

The Sunlite logo is positioned in the top left corner of the page. It features the word "sunlite" in a bold, orange, sans-serif font. The background of the entire page is a photograph of a modern interior space, showing a ceiling with a grid of black metal beams and several long, linear fluorescent light fixtures. Below the ceiling, there is a wooden slatted wall and a glass railing with a metal mesh infill. The right side of the page is a solid orange vertical band.

sunlite

Providing All of Your Lighting Needs Since 1980

2025

FIXTURE CATALOG

About Us

For over 40 years Sunshine Lighting has been providing quality and affordable solutions to the lighting industry and has evolved into a multinational enterprise, growing at a rapid pace to become a leading lighting manufacturer in North America. Sunshine Lighting offers a wide array of products under multiple brands including MKS LED®, Ambiate® and Sunlite® lamps and luminaires. We take great pride in maintaining a personal relationship with each customer. Sunshine Lighting has gained a reputation for quality and affordability while keeping up with the latest technologies.

The Sunlite® brand was introduced in 1996 to provide select lighting technologies consisting of Indoor, Industrial and Outdoor LED and Non-LED fixtures, as well as LED, Compact Fluorescent, HID, Halogen, Decorative, Miniature, Specialty, Stage and Studio lamps. Our dedicated team of technical and product specialists ensures that our products designed with safety and the environment in mind. Most products carry the Underwriters Laboratories (UL), Intertek's ETL Listing, Department of Energy (DOE) Energy Star certifications, Design Lights Consortium (DLC) qualified products listing, and/or the American Lighting Association (ALA) among others.

Through customer interaction and feedback, we introduce new and innovative products to the marketplace as well as continually improving our existing line of items to meet the high expectations our customers have come to rely on us. In addition, we provide exclusive service to customers whether it's a product tweak, modification, or full custom product, Sunshine Lighting's dedicated engineering and project management team is ready assist.

The Sunlite logo features the word "sunlite" in a bold, lowercase, sans-serif font. The "s" and "u" are orange, while the "n", "l", "i", "t", and "e" are black. A registered trademark symbol (®) is located at the top right of the "e".

Copyright ©2025 Sunlite

For Product inquiries or to place an order, please contact us at:

TOLL FREE PHONE: 800.605. BULB
VISIT: www.sunlite.com

**For general information
and request a catalog:** info@sunshinelighting.com

Sales department: sales@sunshinelighting.com

Terms & Conditions <https://sunlite.com/terms-of-use>

NYC Warehouse
744 Clinton Street
Brooklyn, NY 11231
Tel: 718.768.7000
Fax: 718.768.0970

Table of Contents

Indoor Fixture



Linear Ceiling Fixture
Page 6 - 9



Linear Fixture
Page 10 -11



Ceiling Lay-in Fixture
Page 12 - 13



Recessed Downlight Fixture
Page 14 - 23



Ceiling Flush Mount Fixture
Page 24 - 33



LED Module Retrofit Kit
Page 34



Bathroom Vanity Fixture
Page 35 - 41



Wall Mount Sconce
Page 42 -43

Outdoor Fixture



Outdoor Wall Mount Sconce
Page 46-57



Outdoor Security Flood Light
Page 58



Outdoor Wall Mount Series
Page 59 - 61



Outdoor Area Fixtures
Page 62



LED Commercial UFO High Bay
Page 63



Outdoor Post Mounted Fixture
Page 64



Landscaping Fixtures
Page 65



Vaporproof
Page 66



LED Construction Work Light
Page 67 - 68

Exit Signs



Exit Sign & Emergency Lights Combo
Page 70



Exit Sign
Page 71-72



Emergency Lights
Page 73





Indoor
Light Fixtures

Linear Ceiling Fixture

Narrow Strip

2FT

85655-SU

- 15/20/25 Watts
- 27K/30K/35K/40K/50K
- 2060/2742/3167 Lumens



4FT

85659-SU

- 28/35/40 Watts
- 27K/30K/35K/40K/50K
- 3877/4702/5287 Lumens



8FT

85628-SU

- 30/45/60 Watts
- 35K/40K/50K
- 4329/6435/8560 Lumens



OPTIONAL

SPECIFICATION

- Dimmable
- Steel Body
- White Lens
- White Finish
- 80 CRI
- 120-277V

OPTIONAL ADDONS



Remote
85639-SU



V-Hook & Chain
85636-SU



Corner Bracket
85638-SU



End Bracket
85635-SU

Quick & Easy Release

The ability to open the fixture without any tools can be a time-saving and convenient feature, especially during installation or maintenance.



*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85655-SU	SF/ST/LN/24/MW/85S/MV/WH	15/20/25	2060/2742/3167	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 23.95(d)
85656-SU*	SF/ST/LN/24/MW/85S/MV/WH/BLS	15/20/25	2060/2742/3167	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 23.95(d)
85657-SU*	SF/ST/LN/24/MW/85S/MV/WH/EM	15/20/25	2060/2742/3167	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 23.95(d)
85658-SU*	SF/ST/LN/24/MW/85S/MV/WH/BLS/EM	15/20/25	2060/2742/3167	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 23.95(d)
85659-SU	SF/ST/LN/48/MW/85S/MV/WH	28/35/40	3877/4702/5287	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85660-SU*	SF/ST/LN/48/MW/85S/MV/WH/BLS	28/35/40	3877/4702/5287	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85661-SU*	SF/ST/LN/48/MW/85S/MV/WH/EM	28/35/40	3877/4702/5287	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85662-SU*	SF/ST/LN/48/MW/85S/MV/WH/BLS/EM	28/35/40	3877/4702/5287	27K/30K/35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85654-SU	SF/ST/LN/48/HMW/83S/MV/WH	30/45/65	10000	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 47.55(d)
85628-SU	SF/ST/LN/96/MW/83S/MV/WH	30/45/60	4329/6435/8560	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 94.80(d)
85629-SU*	SF/ST/LN/96/MW/83S/MV/WH/BLS	30/45/60	4329/6435/8560	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 94.80(d)
85630-SU*	SF/ST/LN/96/MW/83S/MV/WH/EM	30/45/60	4329/6435/8560	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 94.80(d)
85631-SU*	SF/ST/LN/96/MW/83S/MV/WH/BLS/EM	30/45/60	4329/6435/8560	35K/40K/50K	50000	DL,DIM,DLC	2.65(h) 2.60(w) 94.80(d)

Linear Ceiling Fixture

Contemporary Strip

sunlite

2FT 1 Light

85550-SU

- 10 Watts
- 1150 Lumens



LED
BUILT-IN

5
YEAR
WARRANTY

BATTERY
BACKUP
OPTIONAL

SPECIFICATION

- 35K/40K/50K
- Dimmable
- Steel Body
- White Lens
- White Finish
- 83 CRI
- 120-277V

4FT 1 Light

85551-SU

- 20 Watts
- 2300 Lumens



2FT 2 Light

85552-SU

- 20 Watts
- 2300 Lumens



4FT 2 Light

85553-SU

- 40 Watts
- 4600 Lumens



*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85550-SU	SF/ST/LN/24/1L/10W/83S/MV/WH	10	1150	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 24.0(d)
08531-SU*	SF/ST/LN/24/1L/10W/83S/MV/WH/EM	10	1150	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 24.0(d)
85551-SU	SF/ST/LN/48/1L/20W/83S/MV/WH	20	2300	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 48.0(d)
08532-SU*	SF/ST/LN/48/1L/20W/83S/MV/WH/EM	20	2300	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 2.1(w) 48.0(d)
85552-SU	SF/ST/LN/24/2L/20W/83S/MV/WH	20	2300	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 24.0(d)
90670-SU*	SF/ST/LN/24/2L/20W/83S/MV/WH/EM	20	2300	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 24.0(d)
85553-SU	SF/ST/LN/48/2L/40W/83S/MV/WH	40	4600	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 48.0(d)
90671-SU*	SF/ST/LN/48/2L/40W/83S/MV/WH/EM	40	4600	30K/40K/50K	50000	DL,DIM,DLC	2.4(h) 3.8(w) 48.0(d)

Linear Ceiling Fixture

Stairwell Wrap Strip

2FT

82115-SU


- 10/15/18 Watts
- 30K/40K/50K
- 1150/1725/2070 Lumens
- Dimmable
- Steel Body
- Frosted Lens
- White Finish
- 90 CRI
- 120-277V



OPTIONAL



4W EM Driver
85633-SU



V-Hook & Chain
85636-SU

3FT

PHASING OUT

82119-SU

- 18/25/30 Watts
- 2070/2875/3450 Lumens



4FT

82123-SU


- 20/28/36 Watts
- 1150/1725/2070 Lumens



OPTIONAL ADDONS



8W EM Driver
85634-SU



V-Hook & Chain
85636-SU



Remote
85639-SU

*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82115-SU	SF/WR4/LN/24/MW/93S/MV/WH	10/15/18	1150/1725/2070	30K/40K/50K	50000	DL,DIM	3.25(h) 24.3(w) 4.3(d)
82117-SU*	SF/WR4/LN/24/MW/93S/MV/WH/EM	10/15/18	1150/1725/2070	30K/40K/50K	50000	DL,DIM	3.25(h) 24.3(w) 4.3(d)
82116-SU*	SF/WR4/LN/24/MW/93S/MV/WH/BLS	10/15/18	1150/1725/2070	30K/40K/50K	50000	DL,DIM	3.25(h) 24.3(w) 4.3(d)
82118-SU*	SF/WR4/LN/24/MW/93S/MV/WH/BLS/EM	10/15/18	1150/1725/2070	30K/40K/50K	50000	DL,DIM	3.25(h) 24.3(w) 4.3(d)
82119-SU	SF/WR4/LN/36/MW/93S/MV/WH	18/25/30	2070/2875/3450	30K/40K/50K	50000	DL,DIM	3.25(h) 36.0(w) 4.3(d)
82121-SU*	SF/WR4/LN/36/MW/93S/MV/WH/EM	18/25/30	2070/2875/3450	30K/40K/50K	50000	DL,DIM	3.25(h) 36.0(w) 4.3(d)
82120-SU*	SF/WR4/LN/36/MW/93S/MV/WH/BLS	18/25/30	2070/2875/3450	30K/40K/50K	50000	DL,DIM	3.25(h) 36.0(w) 4.3(d)
82122-SU*	SF/WR4/LN/36/MW/93S/MV/WH/BLS/EM	18/25/30	2070/2875/3450	30K/40K/50K	50000	DL,DIM	3.25(h) 36.0(w) 4.3(d)
82123-SU	SF/WR4/LN/48/MW/93S/MV/WH	20/28/36	2300/3220/4140	30K/40K/50K	50000	DL,DIM	3.25(h) 48.35(w) 4.3(d)
82125-SU*	SF/WR4/LN/48/MW/93S/MV/WH/EM	20/28/36	2300/3220/4140	30K/40K/50K	50000	DL,DIM	3.25(h) 48.35(w) 4.3(d)
82124-SU*	SF/WR4/LN/48/MW/93S/MV/WH/BLS	20/28/36	2300/3220/4140	30K/40K/50K	50000	DL,DIM	3.25(h) 48.35(w) 4.3(d)
82126-SU*	SF/WR4/LN/48/MW/93S/MV/WH/BLS/EM	20/28/36	2300/3220/4140	30K/40K/50K	50000	DL,DIM	3.25(h) 48.35(w) 4.3(d)

Linear Ceiling Fixture

Wrap Strip & Vapor Tight

sunlite

4FT 7" Wrap Strip Linear Fixture

85292-SU

- 30/35/40 Watts
- 35K/40K/50K
- 5360/4795/4200 Lumens



OPTIONAL

SPECIFICATION

- Dimmable
- White Finish Steel Body
- White Lens
- 80 CRI
- 120-277V

4FT 5" Wrap Strip Linear Fixture

85288-SU

- 30/40/50 Watts
- 30K/40K/50K
- 4300 Lumens



SPECIFICATION

- White Finish Steel Body
- White Lens
- 80 CRI
- 120-277V

4FT Linear Vapor Proof Fixture

85260-SU

- 25/38/50 Watts
- 3500/5400/7000 Lumens



OPTIONAL

SPECIFICATION

- 35K/40K/50K
- Polycarbonate Body
- White Lens
- Gray Finish
- 80 CRI
- 120-277

8FT

85261-SU

- 72/80/100 Watts
- 9800/11000/13500 Lumens



OPTIONAL ADDONS



V-Hook & Chain
85636-SU

*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85292-SU	SF/WA7/ST/48/MW/83S/MV/WH	30/35/40	5360/4795/4200	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 7.08(w) 47.72(d)
90721-SU*	SF/WA7/ST/48/MW/83S/MV/WH/EM	30/35/40	5360/4795/4200	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 7.08(w) 47.72(d)
90722-SU*	SF/WA7/ST/48/MW/83S/MV/WH/BLS	30/35/40	5360/4795/4200	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 7.08(w) 47.72(d)
90723-SU*	SF/WA7/ST/48/MW/83S/MV/WH/EM/BLS	30/35/40	5360/4795/4200	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 7.08(w) 47.72(d)
85288-SU	SF/WA5/ST/48/MW/83S/MV/WH	30/40/50	3450/4600/5750	30K/40K/50K	50000	DL,DLC	2.2(h) 5.15(w) 48.0(d)
85260-SU	SF/VTS/ST/48/MW/83S/MV/GR	25/38/50	3500/5400/7000	35K/40K/50K	50000	WL,DIM,DLC	3.42(h) 49.7(w) 3.34(d)
90735-SU*	SF/VTS/ST/48/MW/83S/MV/GR/EM	25/38/50	3500/5400/7000	35K/40K/50K	50000	WL,DIM,DLC	3.42(h) 49.7(w) 3.34(d)
90748-SU*	SF/VTS/ST/48/MW/83S/MV/GR/BLS	25/38/50	3500/5400/7000	35K/40K/50K	50000	WL,DIM,DLC	3.42(h) 49.7(w) 3.34(d)
90737-SU*	SF/VTS/ST/48/MW/83S/MV/GR/EM/BLS	25/38/50	3500/5400/7000	35K/40K/50K	50000	WL,DIM,DLC	3.42(h) 49.7(w) 3.34(d)
85261-SU	SF/VTS/ST/96/MW/83S/MV/GR	72/80/100	9800/11000/13500	35K/40K/50K	50000	WL,DIM,DLC	4.13(h) 96.0(w) 4.33(d)
85265-SU*	SF/VTS/ST/96/MW/83S/MV/GR/BLS	72/80/100	9800/11000/13500	35K/40K/50K	50000	WL,DIM,DLC	4.13(h) 96.0(w) 4.33(d)
90745-SU*	SF/VTS/ST/96/MW/83S/MV/GR/EM	72/80/100	9800/11000/13500	35K/40K/50K	50000	WL,DIM,DLC	4.13(h) 96.0(w) 4.33(d)
85271-SU*	SF/VTS/ST/96/MW/83S/MV/GR/EM/BLS	72/80/100	9800/11000/13500	35K/40K/50K	50000	WL,DIM,DLC	4.13(h) 96.0(w) 4.33(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Linear Fixture

Bed Light Wrap Strip



3FT

49189-SU

- 15/30/45 Watts
- 30K/40K/50K
- 1794/3590/5311 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120V



OPTIONAL

OPTIONAL ADDONS



Pull Chain Sets
04328-CMP

4FT

49190-SU

- 20/40/60 Watts
- 30K/40K/50K
- 2348/4697/6958 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120V



OPTIONAL

OPTIONAL ADDONS



Pull Chain Sets
04328-CMP

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49189-SU	SF/BL/LN/36/45/83S/120/WH	15/30/45	1794/3590/5311	30K/40K/50K	50000	DL,DIM,DLC	4.06(h) 4.22(w) 36(d)
49190-SU	SF/BL/LN/48/60/83S/120/WH	20/40/60	2348/4697/6958	30K/40K/50K	50000	DL,DIM,DLC	4.06(h) 4.22(w) 48.0(d)

Linear Fixture

Under Cabinet Strip

sunlite

12"

53107-SU

- 5 Watts
- 500 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Aluminum & PC Body
- Frosted Lens
- White Finish
- 80 CRI
- 120V

22"

53108-SU

- 9 Watts
- 900 Lumens



34"

53109-SU

- 12 Watts
- 1200 Lumens



46"

53110-SU

- 16 Watts
- 1600 Lumens



OPTIONAL ADDONS

MADE TO ORDER

Hardwire Junction Box
53084-SU

18" Linkable (Hard Wire)

MADE TO ORDER

53079-SU

- 10 Watts
- 30K/40K/50K
- 600 Lumens
- Dimmable
- Metal & Acrylic Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



Remote
85639-SU

****MTO** = Contact us about *made-to-order* items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
53107-SU	SF/UC/LN/12/5W/83S/120/WH	5	500	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 12.3(d)
53108-SU	SF/UC/LN/22/9W/83S/120/WH	9	900	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 22.6(d)
53109-SU	SF/UC/LN/34/12W/83S/120/WH	12	1200	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 34.4(d)
53110-SU	SF/UC/LN/46/16W/83S/120/WH	16	1600	30K/40K/50K	50000	DL	1.2(h) 0.9(w) 46.2(d)
53079-SU**	SF/HUC/LN/18/10W/93S/120/WH	10	600	30K/40K/50K	50000	DL,DIM	1.0(h) 3.7(w) 18.1(d)

Specifications may change without notice. We are not responsible for any typographical errors

Ceiling Lay-in Fixture

Backlit Lay-In Flat Panel

1x4

85640-SU

- 20/40/40 Watts
- 35K/40K/50K
- 2500/3750/5000 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120-277V



OPTIONAL

OPTIONAL ADDONS



Recessed Kit
85087-SU

6FT Conduit Kit
85647-SU



Flange Kit
85652-SU



Surface Frame Kit
85146-SU



EM Inverter
88154-SU



Suspension Kit
85129-SU

2x2

85641-SU

- 26/32/40 Watts
- 30K/35K/40K/50K/65K
- 2500/3750/5000 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120-277V



OPTIONAL

OPTIONAL ADDONS



Surface Frame Kit
85144-SU



Recessed Kit
85651-SU



EM Inverter
88154-SU

Conduit Kit
85648-SU

2x4

85642-SU

- 32/40/50 Watts
- 30K/35K/40K/50K/65K
- 4000/5000/6250 Lumens
- Dimmable
- Steel and Aluminum Body
- White Lens
- White Finish
- 80 CRI
- 120-277V



OPTIONAL

OPTIONAL ADDONS



Recessed Kit
85651-SU



Surface Frame Kit
85149-SU



Flange Kit
85652-SU



EM Inverter
88154-SU



Suspension Kit
85129-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85640-SU	SF/BLI/FP/14/MW/83S/MV/WH/2PK	20/30/40	2500/3750/5000	35K/40K/50K	50000	DL,DIM,DLC	1.4(h) 47.8(w) 11.9(d)
85641-SU	SF/BLI/FP/22/MW/83S/MV/WH/2PK	26/32/40	2500/3750/5000	30K/35K/40K/50K/65K	50000	DL,DIM,DLC	1.4(h) 23.7(w) 23.7(d)
85642-SU	SF/BLI/FP/24/MW/83S/MV/WH/2PK	32/40/50	4000/5000/6250	30K/35K/40K/50K/65K	50000	DL,DIM,DLC	1.4(h) 47.8(w) 23.7(d)

Ceiling Lay-in Fixture

Center-Basket Troffer

sunlite

Wattage & Color Selectable

These Troffer let you select the color temperature (3500K, 4000K, or 5000K) and wattage adjustable brightness. A Microwave Motion Sensor detects movement and automatically turns the light on or adjusts brightness, saving energy and adding convenience.



2x2

85217-SU

- 20/30/40 Watts
- 35K/40K/50K
- 2800/4200/5600 Lumens
- Dimmable
- Steel Body
- White Lens
- White Finish
- 80 CRI
- 100-277V



OPTIONAL

OPTIONAL ADDONS



Surface Frame Kit
85144-SU



Microwave Motion Sensor
85219-SU

2x4

85218-SU

- 30/40/50 Watts
- 35K/40K/50K
- 4000/5300/6300 Lumens
- Dimmable
- Steel Body
- White Lens
- White Finish
- 80 CRI
- 100-277V



OPTIONAL

OPTIONAL ADDONS



Microwave Motion Sensor
85219-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85217-SU	SF/TF/BS/22/MW/83S/MV/WH/2PK	20/30/40	2800/4200/5600	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 23.8(w) 23.8(d)
85218-SU	SF/TF/BS/24/MW/83S/MV/WH/2PK	30/40/50	4000/5300/6300	35K/40K/50K	50000	DL,DIM,DLC	2.8(h) 23.8(w)47.8(d)

Recessed Downlight Fixture

Commercial

4"

87808-SU

- 9/13/18 Watts
- 27K/30K/35K/40K/50K
- 1000/1500/2000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-347V



OPTIONAL

OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87818-CMP

6"

87809-SU

- 3/19/27 Watts
- 27K/30K/35K/40K/50K
- 1500/2100/3000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-347V



OPTIONAL

OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87818-CMP



New Construction Plate
87705-SU

8"

87810-SU

- 18/27/36 Watts
- 27K/30K/35K/40K/50K
- 2000/3000/4000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-347V



9.5"

PHASING OUT

87811-SU

- 20/30/40 Watts
- 27K/30K/35K/40K/50K
- 2500/3750/5000 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120-347V



OPTIONAL

OPTIONAL ADDONS



LED EM Inverter
88154-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87808-SU	SF/CRD/RD/4/MW/95S/MV/WH/V2	9/13/18	1000/1500/2000	27K/30K/35K/40K/50K	50000	DL,DIM	4.0(h) 5.9(d)
87809-SU	SF/CRD/RD/6/MW/95S/MV/WH/V2	13/19/27	1500/2100/3000	27K/30K/35K/40K/50K	50000	DL,DIM	4.4(h) 8.25(d)
87810-SU	SF/CRD/RD/8/MW/95S/MV/WH/V2	18/27/36	2000/3000/4000	27K/30K/35K/40K/50K	50000	DL,DIM	4.75(h) 10.25(d)
87811-SU	SF/CRD/RD/9.5/MW/95S/MV/WH/V2	20/30/40	2500/3750/5000	27K/30K/35K/40K/50K	50000	DL,DIM	4.75(h) 11.2(d)

Recessed Downlight Fixture

Ultra Slim Wafer - Direct to Junction

sunlite®

4" Round Regressed Lens Downlight

SPECIFICATION

- 13 Watts
- 1050 Lumens
- Dimmable
- Aluminum Body
- Glass Lens
- White Finish
- 90 CRI



LED
BUILT-IN

5
YEAR
WARRANTY

87691-SU

2700K

87692-SU

3000K

OPTIONAL ADDONS



Silver Trim
87696-SU



Black Trim
87695-SU

4" Round Flat Lens Downlight

SPECIFICATION

- 10 Watts
- 900 Lumens
- Dimmable
- Aluminum Body
- Glass Lens
- White Finish
- 90 CRI



LED
BUILT-IN

5
YEAR
WARRANTY

87688-SU

2700K

87689-SU

3000K

87690-SU

4000K

OPTIONAL ADDONS



Silver Trim
87696-SU



Black Trim
87695-SU

Direct to Junction Box

MULTIPLE INSTALLATION OPTIONS - installs directly to an octagon junction box or attach the included retrofit hardware for 4" recessed can installation



Retrofit hardware included for directly into recessed cans

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
87691-SU	SF/DRL/RD/4/13/927/120/WH	13	1050	120	2700K	50000	DL,DIM	1.4(h) 4.85(w)
87692-SU	SF/DRL/RD/4/13/930/120/WH	13	1050	120	3000K	50000	DL,DIM	1.4(h) 4.85(w)
87688-SU	SF/DFL/RD/4/10/927/120/WH	10	900	120	2700K	50000	DL,DIM	1.0(h) 4.85(w)
87689-SU	SF/DFL/RD/4/10/930/120/WH	10	900	120	3000K	50000	DL,DIM	1.0(h) 4.85(w)
87690-SU	SF/DFL/RD/4/10/940/120/WH	10	900	120	4000K	50000	DL,DIM	1.0(h) 4.85(w)

Recessed Downlight Fixture

Canless Gimbel - White

1 Light

85607-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 825 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87705-SU



New Construction Plate
87819-CMP

2 Light

85608-SU

- 24 Watts
- 27K/30K/35K/40K/50K
- 1540 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87819-CMP

3 Light

85609-SU

- 36 Watts
- 27K/30K/35K/40K/50K
- 2270 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87819-CMP

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85607-SU	SF/GDL/RD/3.5/1L/12W/95S/120/WH	12	825	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 4.38 (H) 3.25 (D) 4.38
85608-SU	SF/GDL/RD/3.5/2L/24W/95S/120/WH	24	1540	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 7.88 (H) 3.25 (D) 4.38
85609-SU	SF/GDL/RD/3.5/3L/36W/95S/120/WH	36	2270	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 11.68 (H) 3.25 (D) 4.38

Recessed Downlight Fixture

Canless Gimbel - Black

sunlite®

1 Light

08590-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 825 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87705-SU



New Construction Plate
87819-CMP

2 Light

08594-SU

- 24 Watts
- 27K/30K/35K/40K/50K
- 1540 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87819-CMP

3 Light

08593-SU

- 36 Watts
- 27K/30K/35K/40K/50K
- 2270 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



LED EM Inverter
88154-SU



New Construction Plate
87819-CMP

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
08590-SU	SF/GDL/RD/3.5/1L/12W/95S/120/WH/BK	12	825	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 4.38 (H) 3.25 (D) 4.38
08594-SU	SF/GDL/RD/3.5/2L/24W/95S/120/WH/BK	24	1540	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 7.88 (H) 3.25 (D) 4.38
08593-SU	SF/GDL/RD/3.5/3L/36W/95S/120/WH/BK	36	2270	27K/30K/35K/40K/50K	50000	WL,DIM	(W) 11.68 (H) 3.25 (D) 4.38

Recessed Downlight Fixture

Interchangeable Trims

2"

85589-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1055 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



4"

85590-SU

- 18 Watts
- 27K/30K/35K/40K/50K
- 1360 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



6"

85591-SU

- 24 Watts
- 27K/30K/35K/40K/50K
- 1735 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85589-SU	SF/DAD/RD/2/15W/95S/120/WH	15	1055	27K/30K/35K/40K/50K	50000	WL,DIM	(H) 4.92 (D) 3.13
85590-SU	SF/DAD/RD/4/18W/95S/120/WH	18	1360	27K/30K/35K/40K/50K	50000	WL,DIM	(H) 4.8 (D) 4.5
85591-SU	SF/DAD/RD/6/24W/95S/120/WH	24	1735	27K/30K/35K/40K/50K	50000	WL,DIM	(H) 2.95 (D) 7.3

Recessed Downlight Fixture

Gimbel & Allie

sunlite®

3" Gimbel

82098-SU

- 8 Watts
- 27K/30K/35K/40K/50K
- 600 Lumens
- Dimmable
- Aluminum Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87705-SU

4" Allie

87817-SU

- 20 Watts
- 30K/40K/50K
- 1500 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 80 CRI
- 120-277V



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU



Black Trim
50120-SU

4" Square Regressed

85565-SU

- 12 Watts
- 30K/40K/50K
- 900 Lumens
- Dimmable
- Aluminum Body
- Clear Lens
- White Finish
- 92 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87818-CMP

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82098-SU	SF/GDL/RD/3/8W/95S/120/WH	8	600	27K/30K/35K/40K/50K	50000	WL,DIM	1.8(w) 3.3(d)
87817-SU	SF/ALLIE/RD/4/20W/83S/MV/WH	20	1500	30K/40K/55K	50000	DL,DIM	1.75 (h) 4.75(d)
85565-SU	SF/DAD/SQ/4/12W/93S/120/WH	12	900	30K/40K/50K	50000	DL,DIM	3.0(h) 5.8(d)

Recessed Downlight Fixture

Round Canless Slim Wafer

4"

87800-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 700 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

IC
RATED

OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU



Black Trim
50120-SU

6"

87801-SU

- 14 Watts
- 27K/30K/35K/40K/50K
- 1000 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

IC
RATED

OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87807-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU



Black Trim
50121-SU

8"

87804-SU

- 18 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

IC
RATED

OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87807-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU



Black Trim
50121-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87800-SU	SF/SDL/RD/4/12W/95S/120/WH	12	700	27K/30K/35K/40K/50K	50000	WL,DIM	1.0(h) 4.93(d)
87801-SU	SF/SDL/RD/6/14W/95S/120/WH	14	1000	27K/30K/35K/40K/50K	50000	WL,DIM	1.0(h) 6.8(d)
87804-SU	SF/SDL/RD/8/18W/95S/120/WH	18	1100	27K/30K/35K/40K/50K	50000	WL,DIM	1.0(h) 8.85(d)

Recessed Downlight Fixture

Round Canless Slim Wafer - High Output

sunlite

3"

87824-SU

- 8 Watts
- 27K/30K/35K/40K/50K
- 500 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

IC
RATED



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU

4"

87825-SU

- 13 Watts
- 27K/30K/35K/40K/50K
- 1000 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

IC
RATED



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU

6"

87826-SU

- 16 Watts
- 27K/30K/35K/40K/50K
- 1500 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

IC
RATED



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



LED EM Inverter
88154-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87824-SU	SF/SDH/RD/3/8W/95S/120/WH	8	500	27K/30K/35K/40K/50K	50000	WL,DIM	0.51 (h) 3.0(d)
87825-SU	SF/SDH/RD/4/13W/95S/120/WH	13	1000	27K/30K/35K/40K/50K	50000	WL,DIM	0.51 (h) 4.84(d)
87826-SU	SF/SDH/RD/6/16W/95S/120/WH	16	1500	27K/30K/35K/40K/50K	50000	WL,DIM	0.51 (h) 6.80(d)

Recessed Downlight Fixture

Square Canless Slim Wafer & Square Retrofit

4"

87802-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 800 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87818-CMP



New Construction Plate
87705-SU



New Construction Plate
87726-SU



LED EM Inverter
88154-SU

6"

87709-SU

- 12 Watts
- 27K/30K/35K/40K/50K
- 950 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



OPTIONAL ADDONS



New Construction Plate
87726-SU



New Construction Plate
87705-SU



LED EM Inverter
88154-SU



Black Trim
50123-SU

Square Retrofit

4"

89200-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V



5/6"

89129-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87802-SU	SF/SDL/SQ/4/12W/95S/120/WH	12	800	27K/30K/35K/40K/50K	50000	WL,DIM	1.0(h) 4.8(w)
87709-SU	SF/SDL/SQ/8/12W/95S/120/WH	12	950	27K/30K/35K/40K/50K	35000	WL,DIM	0.87(h) 6.8(w)
89200-SU	SF/RDL/SQ/4/11W/95S/120/WH	11	750	27K/30K/35K/40K/50K	50000	DL,DIM	3.2(h) 5.0(w)
89129-SU	SF/RDL/SQ/5-6/14W/95S/120/WH	14	1100	27K/30K/35K/40K/50K	50000	WL,DIM	3.6 (h) 7.3(w)

Recessed Downlight Fixture Round Trim

sunlite®

4"

87792-SU

- Smooth Trim



87790-SU

- Baffle Trim



LED
BUILT-IN

3
YEAR
WARRANTY

SPECIFICATION

- 10 Watts
- 27K/30K/35K/40K/50K
- 700 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V

5/6"

87793-SU

- Smooth Trim



87791-SU

- Baffle Trim



LED
BUILT-IN

3
YEAR
WARRANTY

SPECIFICATION

- 15 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum & Plastic Body
- White Lens
- White Finish
- 90 CRI
- 120V

5/6" Gimbal Head

PHASING OUT

82084-SU

- 11 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY



2-Axis Gimbal
30° Tilt | 360° Rotation

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87792-SU	SF/RDL/RDSM/4/10W/95S/120/WH	10	700	27K/30K/35K/40K/50K	35000	WL,DIM	1.9(w) 5.5(d)
87790-SU	SF/RDL/RDBF/4/10W/95S/120/WH	10	700	27K/30K/35K/40K/50K	35000	WL,DIM	1.9(w) 5.5(d)
87793-SU	SF/RDL/RDSM/5-6/14W/95S/120/WH	15	1100	27K/30K/35K/40K/50K	35000	WL,DIM	1.9(w) 7.4(d)
87791-SU	SF/RDL/RDBF/5-6/14W/95S/120/WH	15	1100	27K/30K/35K/40K/50K	35000	WL,DIM	1.9(w) 7.4(d)
82084-SU	SF/GDL/RD/5-6/11W/95S/120/WH	11	1100	27K/30K/35K/40K/50K	50000	WL,DIM	2.9(w) 7.2(d)

Ceiling Flush Mount Fixture

Double Band Trim



OPTIONAL

10"

88489-SU

- 15 Watts
- 1100 Lumens
- Brush Nickel Finish



12"

87812-SU

- 15 Watts
- 1120 Lumens
- Brush Nickel Finish



14"

87813-SU

- 21 Watts
- 1500 Lumens
- Brush Nickel Finish



16"

87796-SU

- 24 Watts
- 1700 Lumens
- Brush Nickel Finish



18"

87797-SU

- 28 Watts
- 1960 Lumens
- Brush Nickel Finish



OPTIONAL BATTERY BACKUP



Available Brush Nickel Finish

SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- 90 CRI
- 120V

12"

49056-SU

- 17 Watts
- 1050 Lumens
- Polished Brass Finish



14"

50436-SU

- 21 Watts
- 2000 Lumens
- Polished Brass Finish



16"

50739-SU

- 25 Watts
- 2500 Lumens
- Polished Brass Finish



18"

88339-SU

- 30 Watts
- 3000 Lumens
- Polished Brass Finish



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88489-SU	SF/DCO/RD/10/15W/95S/120/BN	15	1000	27K/30K/35K/40K/50K	50000	DL,DIM	3.0(h) 10.0(d)
87812-SU	SF/DCO/RD/12/15W/95S/120/BN/V2	15	1120	27K/30K/35K/40K/50K	50000	DL,DIM,T20	2.87(h) 12.0(d)
87813-SU	SF/DCO/RD/14/21W/95S/120/BN/V2	21	1500	27K/30K/35K/40K/50K	50000	DL,DIM	3.75(h) 14.0(d)
87796-SU	SF/DCO/RD/16/24W/95S/120/BN	24	1700	27K/30K/35K/40K/50K	50000	DL,DIM	3.23(h) 16.0(d)
87797-SU	SF/DCO/RD/18/28W/95S/120/BN	28	1960	27K/30K/35K/40K/50K	50000	DL,DIM	4.0(h) 17.75(d)
49056-SU	SF/DCO/RD/12/17W/95S/120/PB	17	1050	27K/30K/35K/40K/50K	50000	DL,DIM	2.87(h) 12.0(d)
50436-SU	SF/DCO/RD/14/21W/95S/120/PB	21	2000	27K/30K/35K/40K/50K	50000	DL,DIM	3.75(h) 14.0(d)
50739-SU	SF/DCO/RD/16/25W/95S/120/PB	25	2500	27K/30K/35K/40K/50K	50000	DL,DIM	4.0(h) 16.0(d)
88339-SU	SF/DCO/RD/18/30W/95S/120/PB	30	3000	27K/30K/35K/40K/50K	50000	DL,DIM	4.0(h) 17.75(d)
49052-SU	SF/DCO/RD/12/36W/95S/120/BK	36	1800	27K/30K/35K/40K/50K	50000	DL,DIM	2.87(h) 12.0(d)

Ceiling Flush Mount & Pendent Fixture

Double Band Trim

sunlite®

12" Brush Nickel Finish

87783-SU

12" Black Finish

87784-SU



SPECIFICATION

- 15 Watts
- 30K/40K/50K
- 1050 Lumens
- Dimmable
- Steel & Acrylic Body
- White Lens
- 80 CRI
- 120V

Oval Double Band Surface Mount Fixture

32" Brush Nickel Finish

49176-SU

- 35 Watts
- 30K/40K/50K
- 3000 Lumens
- Dimmable
- Steel & Acrylic Body
- Brushed Nickel Finish
- White Lens
- 80 CRI
- 120-277V



32" Black Finish

49175-SU

- 35 Watts
- 30K/40K/50K
- 3000 Lumens
- Dimmable
- Steel & Acrylic Body
- Black Finish
- White Lens
- 80 CRI
- 120-277V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87783-SU	SF/DCO/P/12/15W/83S/120/BN	15	1050	30K/40K/50K	50000	DL,DIM	9.0(w) 12.0(d)
87784-SU	SF/DCO/P/12/15W/83S/120/BK	15	1050	30K/40K/50K	50000	DL,DIM	9.0(w) 12.0(d)
49176-SU	SF/DCO/OVL/32/35W/83S/MV/BN	35	3000	30K/40K/50K	50000	DL,DIM	4.5(h) 18.0(w) 32.5(d)
49175-SU	SF/DCO/OVL/32/35W/83S/MV/BK	35	3000	30K/40K/50K	50000	DL,DIM	4.5(h) 18.0(w) 32.5(d)

Ceiling Flush Mount Fixture

Decorative

13" Square

81042-SU

- 20 Watts
- 1000 Lumens
- 30K/40K/50K
- Dimmable
- Steel Body
- Frosted Lens
- Black Finish
- 80 CRI



13" Round

81045-SU

- 20 Watts
- 1000 Lumens
- 30K/40K/50K
- Dimmable
- Steel Body
- Frosted Lens
- Black Finish
- 80 CRI



Octagonal Design

81328-SU

- 12 Watts
- 650 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- Frosted Glass Lens
- Black Finish
- 80 CRI



13" Round Glass Trim

49154-SU

- 20 Watts
- 1000 Lumens



11" Square Glass Trim

49096-SU

- 20 Watts
- 1000 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Brushed Nickel Finish
- 81 CRI
- 120V

**MTO = Contact us about *made-to-order* items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81042-SU	LFX/DDS/13"/20W/SCT/BK/GD	20	1000	30K/40K/50K	50000	DL,DIM	4.0(h)13.0(w) 13.0(d)
81045-SU	LFX/DDR/13"/20W/SCT/BK/GD	20	1000	30K/40K/50K	50000	DL,DIM	4.0(h)13.0(d)
81328-SU	LFX/PYR/12W/3SCT/BK	12	650	30K/40K/50K	50000	DL	5.0(h) 10.3(w) 10.3(d)
49154-SU**	SG/GL/RD/13/20W/85S/120/BN	20	1000	27K/30K/35K/40K/50K	50000	DL,DIM	2.5(w) 13.37(d)
49096-SU**	SG/GL/SQ/11/20W/85S/120/BN	20	1000	27K/30K/35K/40K/50K	50000	DL,DIM	3.0(w) 11.0(d)

Ceiling Flush Mount Fixture

Mushroom & Solid Band

sunlite

11" Surface Mount Mushroom Fixture

87747-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1050 Lumens



15"

87749-SU

- 25 Watts
- 27K/30K/35K/40K/50K
- 1750 Lumens



LED
BUILT-IN

5
YEAR
WARRANTY

13"

NEW ITEM

87748-SU

- 21 Watts
- 27K/30K/35K/40K/50K
- 1450 Lumens



19"

49120-SU

- 24/28/32 Watts
- 30K/40K/50K
- 2240/1960/1680 Lumens



SPECIFICATION

- Dimmable
- Plastic Body
- White Lens
- 90 CRI
- 120-277V

13" Double Band Trim With Extended Lens

MADE TO ORDER

82001-SU

- 20 Watts
- 1000 Lumens



18"

MADE TO ORDER

87786-SU

- 25 Watts
- 1500 Lumens



LED
BUILT-IN

5
YEAR
WARRANTY

SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- Brushed Nickel Finish
- 80 CRI
- 100-277V

10" Solid Band Trim Fixture

87767-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1050 Lumens



13"

87768-SU

- 21 Watts
- 27K/30K/35K/40K/50K
- 1450 Lumens



LED
BUILT-IN

5
YEAR
WARRANTY

SPECIFICATION

- Dimmable
- Plastic Body
- White Lens
- 80 CRI
- 120V

****MTO** = Contact us about *made-to-order* items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87747-SU	SF/MU/RD/11/15W/95S/MV/WH	15	1050	27K/30K/35K/40K/50K	50000	DL,DIM	3.9(h) 11.1(d)
87748-SU	SF/MU/RD/13/21W/95S/MV/WH	21	1450	27K/30K/35K/40K/50K	50000	DL,DIM	4.6(h) 14.0(d)
87749-SU	SF/MU/RD/15/25W/95S/MV/WH	25	1750	27K/30K/35K/40K/50K	50000	DL,DIM	4.6(h) 15.16(d)
49120-SU	SF/MU/RD/19/MW/93S/MV/WH	24/28/32	2240/1960/1680	30K/40K/50K	50000	DL,DIM	4.1(h) 19(d)
82001-SU**	SF/DFM/RD/13/20W/83S/MV/BN	20	1400	30K/40K/50K	50000	DL,DIM	4.0(w) 13.0(d)
87786-SU**	SF/DFM/RD/18/25W/83S/MV/BN	25	1500	30K/40K/50K	50000	DL,DIM	4.0(w) 17.0(d)
87767-SU	SF/SCF/RD/10/15W/85S/120/BN	15	1050	27K/30K/35K/40K/50K	50000	DL,DIM	2.2(w) 10.0(d)
87768-SU	SF/SCF/RD/13/21W/85S/120/BN	21	1450	27K/30K/35K/40K/50K	50000	DL,DIM	2.2(w) 13.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

Ceiling Flush Mount Fixture

Decorative

13" Alabaster Glass Lens

87785-SU

- 20 Watts
- 1200 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Glass Body
- Alabaster Lens
- Brushed Nickel Finish
- 90 CRI
- 120V



15"

87778-SU

- 25 Watts
- 1610 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Glass Body
- Alabaster Lens
- Brushed Nickel Finish
- 90 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87785-SU	LFX/DBN13/20W/BN/AL/SCT	20	1200	30K/40K/50K	50000	DL,DIM	4.8(w) 13.0(d)
87778-SU	LFX/DBN15/25W/BN/AL/SCT	25	1610	30K/40K/50K	50000	DL,DIM	4.8(w) 15.0(d)

11" Alabaster Lens

04587-SU

- 120 volts
- Med (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed



13"

04588-SU



**BULB
REQUIRED**

BULB SUGGESTION



11" Alabaster Lens

46075-SU

- 120 volts
- Med (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed



15"

46078-SU



**BULB
REQUIRED**

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
04587-SU	DBN11/AL	Brushed Nickel	Alabaster Glass	2	60	5.3(w) 11.3(d)
04588-SU	DBN13/AL	Brushed Nickel	Alabaster Glass	2	60	5.3(w) 13.3(d)
46075-SU	DDB13/AL	Distressed Brown	Alabaster Glass	2	60	5.8(w) 13.3(d)
46078-SU	DDB15/AL	Distressed Brown	Alabaster Glass	3	60	5.5(w) 15.3(d)

Ceiling Flush Mount Fixture

Decorative

sunlite®

16" Brush Nickle with Alabaster Lens

50156-SU

- 120 volts
- Med (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed



**BULB
REQUIRED**

BULB SUGGESTION



11" Polished Brass with Clear Lens

04572-SU



13"

04580-SU



**BULB
REQUIRED**

11" Polished Brass with Frosted Lens

04574-SU



13"

04582-SU



11" Smooth White with Frosted Lens

04578-SU



13"

04586-SU



SPECIFICATION

- 120 volts
- Med (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
50156-SU	DBN16	Brushed Nickel	Alabaster Glass	3	60	6.0(w) 15.75(d)
04572-SU	DBS11/CL	Polished Brass	Clear Glass	2	60	5.3(w) 11.3(d)
04580-SU	DBS13/CL	Polished Brass	Clear Glass	2	60	6.3(w) 13.0(d)
04574-SU	DBS11/FR	Polished Brass	Frosted Glass	2	60	6.0(w) 11.0(d)
04582-SU	DBS13/FR	Polished Brass	Frosted Glass	2	60	6.0(w) 13.3(d)
04578-SU	DWS11/FR	Smooth White	Frosted Glass	2	60	5.3(w) 11.5(d)
04586-SU	DWS13/FR	Smooth White	Frosted Glass	2	60	6.3(w) 13.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

Ceiling Flush Mount Fixture

Round Slim

5"

85671-SU

- 10 Watts
- 27K/30K/35K/40K/50K
- 700 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

OPTIONAL ADDONS



Black Trim
50206-SU

7"

85672-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

BATTERY
BACKUP
OPTIONAL

OPTIONAL ADDONS



Emergency Battery
81269-SU



Black Trim
50208-SU

9"

81286-SU

- 18 Watts
- 27K/30K/35K/40K/50K
- 1100 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

11"

85674-SU

- 21 Watts
- 27K/30K/35K/40K/50K
- 2000 Lumens
- Dimmable
- Aluminum Body
- Frosted Lens
- White Finish
- 90 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85671-SU	SF/MP/RD/5/10W/95S/120/WH	10	700	27K/30K/35K/40K/50K	50000	DL,DIM	0.6(w) 5.5(d)
85672-SU	SF/MP/RD/7/15W/95S/120/WH	15	1100	27K/30K/35K/40K/50K	50000	DL,DIM	0.6(w) 9.0(d)
81286-SU	SF/MP/RD/9/18W/95S/120/WH	18	1100	27K/30K/35K/40K/50K	50000	DL,DIM	0.63(w) 9.0(d)
85674-SU	SF/MP/RD/11/21W/95S/120/WH	21	2000	27K/30K/35K/40K/50K	50000	DL,DIM	0.7(w)11.0(d)

Ceiling Flush Mount Fixture

Square Slim & Motion Closet

sunlite®

5" Slim Square Surface Mount Fixture

81283-SU

- 10 Watts
- 600 Lumens



9"

81287-SU

- 18 Watts
- 1200 Lumens



SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V

5" Motion Closet Light

81325-SU


- 10 Watts
- 27K/30K/35K/40K/50K
- 700 Lumens



8"

81327-SU

- 13 Watts
- 27K/30K/35K/40K/50K
- 1000 Lumens



SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Aluminum Body
- White Lens
- White Finish
- 90 CRI
- 120V

12"

81329-SU

- 18 Watts
- 27K/30K/35K/40K/50K
- 1400 Lumens



On/Off / Bi-Level
Sensor



SCT Switch

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81283-SU	SF/MP/SQ/5/10W/95S/120/WH	10	600	27K/30K/35K/40K/50K	50000	DL,DIM	0.6(w) 7.4(d)
81287-SU	SF/MP/SQ/9/18W/95S/120/WH	18	1200	27K/30K/35K/40K/50K	50000	DL,DIM	0.6(h) 9.0(d)
81325-SU	SF/MP/RD/5/12W/95S/120/WH/MS	12	700	27K/30K/35K/40K/50K	50000	DL,DIM	0.9(w) 5.7(d)
81327-SU	SF/MP/RD/8/13W/95S/120/WH/MS	13	1000	27K/30K/35K/40K/50K	50000	DL,DIM	0.9(w) 8.2(d)
81329-SU	SF/MP/RD/12/18W/95S/120/WH/MS	18	1400	27K/30K/35K/40K/50K	50000	DL,DIM	0.9(w) 12.1(d)

Ceiling Flush Mount Fixture

11" Mushroom Solid Band Trim

87765-SU

- 15 Watts
- 1050 Lumens



13"

87766-SU

- 21 Watts
- 1450 Lumens



SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Plastic Body
- White Lens
- 80 CRI
- 120V

7" Solid Band Slim Design

88312-SU

- 15 Watts
- 27K/30K/35K/40K/50K
- 950 Lumens
- Brushed Nickel Finish
- 120V



7"

88698-SU

- 15 Watts
- 30K/40K/50K
- 1000 Lumens
- Black Finish
- 80 CRI



SPECIFICATION

- Dimmable
- Plastic Body
- White Lens
- 120V

6" Slim Disc Light

87798-SU

- 10 Watts
- 650 Lumens



7"

87799-SU

- 15 Watts
- 950 Lumens



SPECIFICATION

- 27K/30K/35K/40K/50K
- Dimmable
- Plastic Body
- White Lens
- 90 CRI
- 120V



E26 Retrofit Kit and Recessed Housing Included

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87765-SU	SF/AM/RD/11/15W/85S/120	15	1050	27K/30K/35K/40K/50K	50000	DL,DIM	3.3(w) 10.0(d)
87766-SU	SF/AM/RD/21/21W/85S/120	21	1450	27K/30K/35K/40K/50K	50000	DL,DIM	3.6(w) 13.0(d)
88312-SU	SF/DCO/MINI/7/15W/95S/120/BN	15	950	27K/30K/35K/40K/50K	50000	DL,DIM	1.3(w) 7.4(d)
88698-SU	SF/DCO/MINI/7/15W/83S/120/BK	15	1000	30K/40K/50K	50000	WL,DIM	1.3(w) 7.4(d)
87798-SU	SF/DISC/6/10W/95S/WH	10	650	27K/30K/35K/40K/50K	50000	WL,DIM	1.29(h) 5.47(d)
87799-SU	SF/DISC/7/15W/95S/WH/V2	15	950	27K/30K/35K/40K/50K	50000	WL,DIM	1.34(h) 7.28(d)

Cylinder

90161-SU

- Surface Mount
- 120 volts
- Medium (E26) Base
- Black finish
- Metal Body
- ETL Listed
- Bulb Not Included



**BULB
REQUIRED**

Cube

90159-SU

- Surface Mount
- 120 volts
- GU10 Base
- Metal Body
- ETL Listed
- Bulb Not Included



**BULB
REQUIRED**

Mushroom

04490-SU

- Surface Mount
- 120 volts
- Med (E26)
- Uses CFL / LED Bulb(s)
- Metal & Glass Body
- UL Listed
- Bulb Not Included



**BULB
REQUIRED**

Socket

46071-SU

- Surface Mount
- 120 volts
- Medium (E26) Base
- Metal Body
- UL Listed
- Bulb Not Included



**BULB
REQUIRED**

Fluorescent Circline

04390-SU

- Surface Mount
- 120 volts
- 4-Pin Base
- Uses FC8T9 Bulb
- UL Listed
- Bulb Not Included



**BULB
REQUIRED**

BULB SUGGESTION



T9 Circline

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
90161-SU	FIX/1LT/BK/E26	Black	-	1	60	7.0(h) 5.0(d)
90159-SU	FIX/CUBE/GU10/BK	Black	-	1	50	4.0(h) 4.0(w) 4.0(d)
04490-SU	HALL6/WH	White	White Glass	1	60	5.0(w) 6.0(d)
46071-SU	FIX/LH/E26/BK/5"	Black	-	1	60	2.8(h) 5.0(d)
04390-SU	32/CR	Chrome	-	1	32	3.5(w) 12.3(d)

LED Module Retrofit Kit

AC Light Engine

3"

88458-SU

- 10 Watts
- 1000 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



4"

88476-SU

- 17 Watts
- 1050 Lumens
- 27K/30K/40K/50K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



5"

88281-SU

- 20 Watts
- 2800 Lumens
- 27K/30K40K/50K/65K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



6.5"

88282-SU

- 25 Watts
- 2500 Lumens
- 27K/30K40K/50K/65K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



6.5"

88283-SU

- 30 Watts
- 3000 Lumens
- 27K/30K40K/50K/65K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



7.3"

88479-SU

- 24 Watts
- 1800 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Plastic Body
- Clear Lens
- White Finish
- 90 CRI
- 120V



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88458-SU	MODULE/LED/3"/10W/3SCT/AC	10	1000	120	30K/40K/50K	50000	DL,DIM	3.0(d)
88476-SU	MODULE/LED/4"/17W/5SCT	17	1050	120	27K/30K40K/50K	25000	DL,DIM	0.8(h) 4.4(w) 4.4(d)
88281-SU	MODULE/LED/5"/20W/SCT/AC	20	2000	120	27K/30K40K/50K/65K	50000	DL,DIM	5.0(d)
88282-SU	MODULE/LED/6.5"/25W/SCT/AC	25	2500	120	27K/30K40K/50K/65K	50000	DL,DIM	6.5(d)
88283-SU	MODULE/LED/6.5"/30W/SCT/AC	30	3000	120	27K/30K40K/50K/65K	50000	DL,DIM	6.5(d)
88479-SU	MODULE/LED/7.3"/15W/SCT	15	1350	120	30K/40K/50K	50000	DL,DIM	0.55(h) 7.3(w) 7.3(d)

Bathroom Vanity Fixture

Double Band Trim

sunlite

24"

81491-SU

- 15/20/25 Watts
- 1420/1895/2370 Lumens



36"

81492-SU

- 18/25/30 Watts
- 1820/2530/3035 Lumens



48"

81493-SU

- 28/35/40 Watts
- 2860/3575/4050 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Brushed Nickel Bronze Finish
- 90 CRI
- 120-277V

24"

MADE TO ORDER

81371-SU

- 15/20/25 Watts
- 1420/1895/2370 Lumens



36"

MADE TO ORDER

81373-SU

- 18/25/30 Watts
- 1820/2530/3035 Lumens



48"

MADE TO ORDER

81375-SU

- 28/35/40 Watts
- 2860/3575/4050 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Black Finish
- 90 CRI
- 120-277V

*ATO = Contact us about assembled items, inventory, and lead time.

**MTO = Contact us about made-to-order items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81491-SU	SF/VF/24/MW/93S/BN	15/20/25	1420/1895/2370	30K/40K/50K	50000	DL,DIM	4.33(h) 24.2(w) 5.86(d)
90674-SU*	SF/VF/24/MW/93S/BN/EM	15/20/25	1420/1895/2370	30K/40K/50K	50000	DL,DIM	4.33(h) 24.2(w) 5.86(d)
81492-SU	SF/VF/36/MW/93S/BN	18/25/30	1820/2530/3035	30K/40K/50K	50000	DL,DIM	4.33(h) 36.0(w) 5.86(d)
90680-SU*	SF/VF/36/MW/93S/BN/EM	18/25/30	1820/2530/3035	30K/40K/50K	50000	DL,DIM	4.33(h) 36.0(w) 5.86(d)
81493-SU	SF/VF/48/MW/93S/BN	28/35/40	2860/3575/4050	30K/40K/50K	50000	DL,DIM	4.33(h) 47.83(w) 5.86(d)
90686-SU*	SF/VF/48/MW/93S/BN/EM	28/35/40	2860/3575/4050	30K/40K/50K	50000	DL,DIM	4.33(h) 47.83(w) 5.86(d)
81371-SU**	SF/VF/24/MW/93S/BK	10/20/25	2200	30K/40K/50K	50000	WL,DIM	4.4(h) 24.0(w) 5.9(d)
90675-SU**	SF/VF/24/MW/93S/BK/EM	10/20/25	2200	30K/40K/50K	50000	WL,DIM	4.4(h) 24.0(w) 5.9(d)
81373-SU**	SF/VF/36/30W/93S/BK	30	2600	30K/40K/50K	50000	WL,DIM	4.3(h) 36.0 (w) 5.9(d)
90681-SU**	SF/VF/36/30W/93S/BK/EM	30	2600	30K/40K/50K	50000	WL,DIM	4.3(h) 36.0 (w) 5.9(d)
81375-SU**	SF/VF/48/40W/93S/BK	40	3500	30K/40K/50K	50000	WL,DIM	4.3(h) 36.0 (w) 5.9(d)
90687-SU**	SF/VF/48/40W/93S/BK/EM	40	3500	30K/40K/50K	50000	WL,DIM	4.3(h) 36.0 (w) 5.9(d)

Specifications may change without notice. We are not responsible for any typographical errors

Bathroom Vanity Fixture

LED Bar

18"

81494-SU

- 15 Watts
- 1200 Lumens



24"

81376-SU

- 20 Watts
- 1600 Lumens



36"

81495-SU

- 25 Watts
- 2000 Lumens



48"

81496-SU

- 30 Watts
- 2400 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Black Finish
- 90 CRI
- 100-277V

18"

81460-SU

- 20 Watts
- 1400 Lumens



24"

81461-SU

- 25 Watts
- 1750 Lumens



36"

81462-SU

- 30 Watts
- 2100 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Lens
- Brushed Nickel Finish
- 90 CRI
- 100-277V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81494-SU	SF/BAR/18/15W/93S/MV/BK	15	1200	30K/40K/50K	50000	DL,DIM	3.25(h) 18.75(w) 4.75(d)
81376-SU	SF/BAR/24/20W/93S/MV/BK	20	1600	30K/40K/50K	50000	DL,DIM	2.5(h) 24.0(w) 4.5(d)
81495-SU	SF/BAR/36/25W/93S/MV/BK	25	2000	30K/40K/50K	50000	DL,DIM	2.5(h)36.0(w) 4.5(d)
81496-SU	SF/BAR/48/30W/93S/MV/BK	30	2400	30K/40K/50K	50000	DL,DIM	3.25(h)48.75(w) 4.75(d)
81460-SU	SF/BAR/24/20W/93S/MV/BN	20	1400	30K/40K/50K	50000	DL,DIM	2.5(h) 18.0(w) 4.5(d)
81461-SU	SF/BAR/36/25W/93S/MV/BN	25	1750	30K/40K/50K	50000	DL,DIM	2.5(h) 24.0(w) 4.5(d)
81462-SU	SF/BAR/48/30W/93S/MV/BN	30	2100	30K/40K/50K	50000	DL,DIM	2.5(h) 36.0(w) 4.5(d)

Bathroom Vanity Fixture

LED Bar

sunlite®

18" Modern Contemporary Vanity

85119-SU

- 15 Watts
- 950 Lumens




SPECIFICATION

- 30K/40K/50K
- Dimmable
- Metal & Acrylic Body
- White Lens
- Chrome Finish
- 80 CRI
- 120V

24"

85094-SU


- 20 Watts
- 1300 Lumens



36"

85120-SU

- 30 Watts
- 1950 Lumens



18"

81132-SU



SPECIFICATION

- 20 Watts
- 1600 Lumens
- 30K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Acrylic Lens
- Brushed Nickel Finish
- 80 CRI
- 120V

27"

81031-SU



SPECIFICATION

- 15 Watts
- 1050 Lumens
- 27K/30K/35K/40K/50K
- Dimmable
- Steel & Acrylic Body
- White Acrylic Lens
- Chrome Finish
- 80 CRI
- 120V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85119-SU	SF/VF/18/15W/83S/120/BN	15	950	30K/40K/50K	50000	DL,DIM	4.25(h) 18.0(w) 3.5(d)
85094-SU	SF/VF/24/20W/83S/120/BN	20	1300	30K/40K/50K	50000	DL,DIM	4.25(h) 24.0(w) 3.5(d)
85120-SU	SF/VF/36/30W/83S/120/BN	30	1950	30K/40K/50K	50000	DL,DIM	4.25(h) 36.0(w) 3.5(d)
81132-SU	SF/BAR/ACR/18/20W/83S/120/BN	20	1600	30K/40K/50K	50000	DL,DIM	3.5(h) 18.5(w) 4.0(d)
81031-SU	LFX/BAR/REC/2LT/15W/SCT/BN	15	1050	27K/30K/35K/40K/50K	50000	DL,DIM	4.8(h) 27.0(w) 3.0(d)

Bathroom Vanity Fixture

Contemporary Design

1 Light

82111-SU

- 10 Watts
- 650 Lumens

2 Light

82112-SU

- 20 Watts
- 1300 Lumens

3 Light

82113-SU

- 30 Watts
- 1900 Lumens

4 Light

82114-SU

- 40 Watts
- 2300 Lumens



SPECIFICATION

- 30K/40K/50K
- Dimmable
- Steel & Plastic Body
- Frosted Lens
- Brushed Nickel Finish
- 90 CRI

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82111-SU	LFX/VF/1L/10W/90CRI/3SCT/BN	10	650	30K/40K/50K	50000	DL,DIM	3.35(h)6.75(w)4.1(d)
82112-SU	LFX/VF/2L/20W/90CRI/3SCT/BN	20	1300	30K/40K/50K	50000	DL,DIM	3.35(h)14.85(w)4.1(d)
82113-SU	LFX/VF/3L/30W/90CRI/3SCT/BN	30	1900	30K/40K/50K	50000	DL,DIM	3.35(h)23.0(w)4.1(d)
82114-SU	LFX/VF/4L/40W/90CRI/3SCT/BN	40	2300	30K/40K/50K	50000	DL,DIM	3.35(h)31.1(w)4.1(d)

3 Light

45000-SU

- Brushed Nickel Finish



3 Light

45025-SU

- Chrome Finish



**BULB
REQUIRED**

SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal Body
- UL Listed

BULB SUGGESTION



A19
Med E26



G25
Med E26

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
45000-SU	B318/BN	Brushed Nickel	-	3	60	4.9(h) 2.3(w) 18.0(d)
45025-SU	B318/CH	Chrome	-	3	60	4.9(h) 2.3(w) 18.0(d)

Bathroom Vanity Fixture

Decorative Sconces

sunlite®

3 Light

MADE TO ORDER

45059-SU



4Light

MADE TO ORDER

45060-SU



**BULB
REQUIRED**

SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed

BULB SUGGESTION



A19
Med E26

1 Light

MADE TO ORDER

45055-SU



2 Light

MADE TO ORDER

45056-SU



3 Light

MADE TO ORDER

45057-SU



4 Light

MADE TO ORDER

45058-SU



1 Light

MADE TO ORDER

46061-SU



2 Light

MADE TO ORDER

46062-SU



3 Light

MADE TO ORDER

46063-SU



4 Light

MADE TO ORDER

46064-SU



****MTO** = Contact us about *made-to-order* items, inventory, and lead time.

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
45059-SU**	FIX/SM/BATH/3LT/E26/BN/WH	Brushed Nickel	White Glass	3	100	8.5(h) 6.0(w) 24.0(d)
45060-SU**	FIX/SM/BATH/4LT/E26/BN/WH	Brushed Nickel	White Glass	4	100	8.5(h) 6.0(w) 33.5(d)
45055-SU**	FIX/FM/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	7.0(h) 5.5(w) 7.8(d)
45056-SU**	FIX/FM/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	7.0(h) 6.3(w) 17.0(d)
45057-SU**	FIX/FM/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	7.0(h) 6.3(w) 24.0(d)
45058-SU**	FIX/FM/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	7.0(h) 6.3(w) 30.0(d)
46061-SU**	FIX/SQ/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	4.3(h) 4.3(w) 4.3(d)
46062-SU**	FIX/SQ/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	8.8(h) 5.0(w) 14.0(d)
46063-SU**	FIX/SQ/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	8.8(h) 5.0(w) 20.0(d)
46064-SU**	FIX/SQ/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	8.8(h) 5.0(w) 25.6(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Bathroom Vanity Fixture

Decorative Sconces

1 Light

MADE TO ORDER

45055-SU



2 Light

MADE TO ORDER

45056-SU



3 Light

MADE TO ORDER

45057-SU



SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed

BULB SUGGESTION



A19
Med E26

4 Light

MADE TO ORDER

45058-SU



1 Light

MADE TO ORDER

46061-SU



2 Light

MADE TO ORDER

46062-SU



3 Light

MADE TO ORDER

46063-SU



SPECIFICATION

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed

BULB SUGGESTION



A19
Med E26

4 Light

MADE TO ORDER

46064-SU



****MTO** = Contact us about *made-to-order* items, inventory, and lead time.

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
45055-SU**	FIX/FM/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	7.0(h) 5.5(w) 7.8(d)
45056-SU**	FIX/FM/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	7.0(h) 6.3(w) 17.0(d)
45057-SU**	FIX/FM/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	7.0(h) 6.3(w) 24.0(d)
45058-SU**	FIX/FM/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	7.0(h) 6.3(w) 30.0(d)
46061-SU**	FIX/SQ/BATH/1LT/E26/BN/FR	Brushed Nickel	Frosted Glass	1	100	4.3(h) 4.3(w) 4.3(d)
46062-SU**	FIX/SQ/BATH/2LT/E26/BN/FR	Brushed Nickel	Frosted Glass	2	100	8.8(h) 5.0(w) 14.0(d)
46063-SU**	FIX/SQ/BATH/3LT/E26/BN/FR	Brushed Nickel	Frosted Glass	3	100	8.8(h) 5.0(w) 20.0(d)
46064-SU**	FIX/SQ/BATH/4LT/E26/BN/FR	Brushed Nickel	Frosted Glass	4	100	8.8(h) 5.0(w) 25.6(d)

Bathroom Vanity Fixture

Decorative Sconces

sunlite®

1 Light			2 Light			3 Light			BULB REQUIRED	SPECIFICATION	
81319-SU			81320-SU			81321-SU				• Wall Mount • 120 volts • Medium (E26) Base • Uses A19 Bulb(s) • Metal Body • UL Listed	BULB SUGGESTION
										 A19 Med E26	

1 Light			2 Light			3 Light			BULB REQUIRED	SPECIFICATION	
81322-SU			81323-SU			81324-SU				• Wall Mount • 120 volts • Medium (E26) Base • Uses A19 Bulb(s) • Metal Body • UL Listed	BULB SUGGESTION
										 A19 Med E26	

1 Light			2 Light			3 Light			BULB REQUIRED	SPECIFICATION	
81316-SU			81317-SU			81318-SU				• Wall Mount • 120 volts • Medium (E26) Base • Uses A19 Bulb(s) • Metal Body • UL Listed	BULB SUGGESTION
										 A19 Med E26	

**MTO = Contact us about made-to-order items, inventory, and lead time.

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
81319-SU**	FIX/VF/1LT/E26/BN/FR	Brushed Nickel	White Glass	1	60	10.0(h) 4.8(w) 5.4(d)
81320-SU**	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	10.0(h) 13.0(w) 5.5(d)
81321-SU**	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	10.0(h) 22.0(w) 5.5(d)
81322-SU**	FIX/VF/1LT/E26/BN/FR	Brushed Nickel	White Glass	1	60	7.0(h) 5.0(w) 6.0(d)
81323-SU**	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	7.0(h) 16.0(w) 6.0(d)
81324-SU**	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	7.0(h) 24.0(w) 6.0(d)
81316-SU**	FIX/VF/1LT/E26/BN/FR	Brushed Nickel	White Glass	1	60	9.0(h) 5.0(w) 7.0(d)
81317-SU**	FIX/VF/2LT/E26/BN/FR	Brushed Nickel	White Glass	2	60	9.0(h) 16.0(w) 7.0(d)
81318-SU**	FIX/VF/3LT/E26/BN/FR	Brushed Nickel	White Glass	3	60	9.0(h) 24.0(w) 7.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

Wall Mount Sconce

Decorative



85098-SU

MADE TO ORDER



85099-SU

MADE TO ORDER



85100-SU

MADE TO ORDER



85101-SU

MADE TO ORDER

SPECIFICATION

- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Plastic Body
- White Lens
- Brushed Nickel Finish
- 80 CRI
- 120V



81034-SU

MADE TO ORDER



- 15 Watts
- 850 Lumens
- 3000K
- Dimmable
- Steel & Plastic Body
- White Acrylic Lens
- Brushed Nickel Finish
- 80 CRI
- 120V



81033-SU

- 15 Watts
- 1000 Lumens
- 3000K
- Dimmable
- Metal Body
- Clear Seedy Glass
- Brushed Nickel Finish
- 80 CRI
- 120V



Sconce with Switch



88685-SU

MADE TO ORDER

- 6 Watts
- 420 Lumens
- 3000K
- Dimmable
- Aluminum & Steel Body
- White Lens
- Brushed Nickel Finish
- 80 CRI
- 120V



**MTO = Contact us about *made-to-order* items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85098-SU**	LFX/WS/HBN/12W/SCT/BN	12	800	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
85099-SU**	LFX/WS/CRV/12W/SCT/BN	12	800	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
85100-SU**	LFX/WS/SQB/12W/SCT/BN	12	800	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
85101-SU**	LFX/WS/MBN/12W/SCT/BN	12	800	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
81034-SU**	LFX/WS/15W/30K/BN	15	850	3000K	50000	DL,DIM	13.5(h) 4.5(w) 4.0(d)
81033-SU	LFX/WS/SEEDY/2LT/15W/30K/BN	15	1000	3000K	50000	DL,DIM	12.0(h) 5.0(w) 4.0(d)
88685-SU**	LFX/WS/30K/6W/LT/BN/8"	6	420	3000K	50000	DL,DIM	8.0(h) 4.5(w) 3.8(d)

Wall Mount Sconce

Half Cylinder

sunlite

49200-SU

- 11/15/23 Watts
- 850/1150/1650 Lumens
- 30K/40K/50K
- Dimmable
- Metal & Plastic Body
- White Lens
- Brushed Nickel
- 90 CRI
- 120V



88679-SU

- 15 Watts
- 1050 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Steel Body
- White Glass Lens
- Brushed Nickel
- 90 CRI
- 120V



82023-SU

- 15 Watts
- 1050 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Plastic Body
- White Lens
- Black Finish
- 81 CRI
- 120V



49201-SU

- 12 Watts
- 1050 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- White Acrylic Lens
- Brushed Nickel
- 90 CRI
- 120V



*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49200-SU	SF/WS/HC/MW/15W/93S/120/BN	11/15/23	850/1150/1650	30K/40K/50K	50000	DL,DIM	10.5(h) 8.0(w) 3.7(d)
88679-SU	SF/WS/HC/15W/93S/120/BN	15	1050	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
88694-SU*	SF/WS/HC/15W/93S/120/BN/MS	15	1050	30K/40K/50K	50000	DL,DIM	10.0(h) 5.0(w)
82023-SU	LFX/WS/HC/15W/SCT/BK	15	950	30K/40K/50K	50000	WL,DIM	10.0(h) 7.0(w) 3.0(d)
49201-SU	LFX/HM/12W/CRI90/3SCT/BN	12	840	30K/40K/50K	50000	DL,DIM	5.9(h) 11.8(w) 3.3(d)

Specifications may change without notice. We are not responsible for any typographical errors





Outdoor
Light Fixtures

Outdoor Ceiling Flush Mount Fixture

Pyramid Design

87787-SU

- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Frosted Lens
- Black Finish
- 80 CRI



LED
BUILT-IN

5
YEAR
WARRANTY

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87787-SU	LFX/OOF/17W/SCT/BK	17	800	30K/40K/50K	50000	WL,DIM	4.75(w) 12(d)

LED Outdoor Wall Mount Series

Porch Lighting

81384-SU

- 12 Watt
- 650 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Frosted Lens
- Textured Black Finish
- 80 CRI
- 120V



LED
BUILT-IN

5
YEAR
WARRANTY

Porch Lighting

85103-SU

- 12 Watt
- 650 Lumens
- 30K/40K/50K
- Aluminum Body
- White Lens
- Black Finish
- 80 CRI
- 120v



LED
BUILT-IN

5
YEAR
WARRANTY

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81384-SU	LFX/BH/20W/3SCT/BK	20	1000	30K/40K/50K	50000	WL,DIM	3.6(w) 11.0(d)
85103-SU	LFX/BH/12W/SCT/BK	12	650	30K/40K/50K	50000	WL	11.8(h)7.4(w) 3.7(d)

82023-SU

- 15 Watts
- 1050 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Plastic Body
- White Lens
- Black Finish
- 81 CRI
- 120V



OPTIONAL

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
82023-SU	LFX/WS/HC/15W/SCT/BK	15	950	30K/40K/50K	50000	WL,DIM	10.0(h) 7.0(w) 3.0(d)
90668-SU*	LFX/WS/HC/15W/SCT/BK/EM	15	950	30K/40K/50K	50000	WL,DIM	10.0(h) 7.0(w) 3.0(d)
90667-SU*	LFX/WS/HC/15W/SCT/BK/MS	15	950	30K/40K/50K	50000	WL,DIM	10.0(h) 7.0(w) 3.0(d)

Vintage Style

12"**81434-SU**

- 15 Watts
- 800 Lumens

**18"****81435-SU**

- 20 Watts
- 1000 Lumens

**24"****81436-SU**

- 23 Watts
- 1200 Lumens

**30"****91167-SU**

- 28 Watts
- 1400 Lumens



OPTIONAL

SPECIFICATION

- 28 Watts
- 1400 Lumens
- 30K/40K/50K
- Metal Body
- Acrylic White Lens
- Black / Bronze Finish
- 80 CRI

*ATO = Contact us about assembled items, inventory, and lead time.

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81434-SU	SF/WS/AQ/12/15W/83S/MV/BK	15	800	100-277	30K/40K/50K	50000	WL	12.0(h) 6.0(w) 4.0(d)
90501-SU*	SF/WS/AQ/12/15W/83S/MV/BK/EM	15	800	100-277	30K/40K/50K	50000	WL	12.0(h) 6.0(w) 4.0(d)
81435-SU	SF/WS/AQ/18/20W/83S/MV/BK	20	1000	100-277	30K/40K/50K	50000	WL	18.0(h) 6.0(w) 4.0(d)
90502-SU*	SF/WS/AQ/18/20W/83S/MV/BK/EM	20	1000	100-277	30K/40K/50K	50000	WL	18.0(h) 6.0(w) 4.0(d)
81436-SU	SF/WS/AQ/24/23W/83S/MV/BK	23	1200	100-277	30K/40K/50K	50000	WL	24.0(h) 6.0(w) 4.0(d)
90505-SU*	SF/WS/AQ/24/23W/83S/MV/BK/EM	23	1200	100-277	30K/40K/50K	50000	WL	24.0(h) 6.0(w) 4.0(d)
91167-SU	SF/WS/AQ/30/28W/83S/MV/BK	28	1400	100-277	30K/40K/50K	50000	WL	30.0(h) 6.0(w) 4.0(d)
90506-SU*	SF/WS/AQ/30/28W/83S/MV/BK/EM	28	1400	100-277	30K/40K/50K	50000	WL	30.0(h) 6.0(w) 4.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

Outdoor Wall Mount Sconce

47040-SU

- 120 volts
- Med (E26)
- Metal & Glass Body
- UL Listed



47000-SU



**BULB
REQUIRED**

BULB SUGGESTION



41370-SU

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb
- Polycarbonate Body
- UL Listed-Wet Location



41367-SU



**BULB
REQUIRED**

BULB SUGGESTION



Black Buckhead

47020-SU

- 120 volts
- Medium (E26) Base
- Metal & Glass Body
- UL Listed



White Buckhead

47030-SU



**BULB
REQUIRED**

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
47040-SU	ODI1040/BK/E26	Black	Clear Glass	1	100	7.5(h) 4.5(w) 5.8(d)
47000-SU	ODI1000/BK/E26	Black	White Glass	1	60	7.7(h) 6.0(w) 6.7(d)
41370-SU	DOD/NC/BK/CL/MED	Black	White Acrylic	1	60	13.0(h) 11.0(w) 10.1(d)
41367-SU	DOD/NC/WH/CL/MED	White	White Acrylic	1	60	11.0(h) 11.0(w) 10.1(d)
47020-SU	ODI1020/BK	Black	Frosted Glass	1	100	8.2(h) 5.0 (w) 4.1(d)
47030-SU	ODI1030/WH	White	Frosted Glass	1	100	8.7(h) 4.1(w) 4.4(d)

LED Outdoor Gooseneck Fixture Wall Mount

sunlite

81315-SU

- 12 Watts
- 700 Lumens
- 3000K
- Dimmable
- Steel Body
- Matte Black Finish
- 80 CRI



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81315-SU	LFX/GN/12W/30/BK	12	700	120	3000K	50000	WL,DIM	12.0(w) 15.0(d)

Outdoor Gooseneck Fixture

46067-SU

- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal Body
- Black Finish
- UL Listed—Wet Location
- Bulb Not Included



**BULB
REQUIRED**

BULB SUGGESTION



A19
Med E26

46069-SU

- Red Finish



46068-SU

- White Finish



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
46067-SU	FIX/GN/E26/BLACK	Black	-	1	60	11.5(h) 12.0(w) 15.0(d)
46069-SU	FIX/GN/E26/RED	Red	-	1	60	11.5(h) 12.0(w) 15.0(d)
46068-SU	FIX/GN/E26/WHITE	White	-	1	60	11.5(h) 12.0(w) 15.0(d)

Outdoor Wall Mount Sconce

Vintage Style with Built-in Photocell

88682-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88686-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88680-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88681-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88683-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



88687-SU



- 9 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88682-SU	LFX/WS/SCT/HC/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	10.0(h) 10.3(w) 4.0(d)
88686-SU	LFX/WS/SCT/RT/12W/TG/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.4(h) 8.5(w) 5.0(d)
88680-SU	LFX/WS/SCT/HH/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	12.1(h) 8.0(w) 5.7(d)
88681-SU	LFX/WS/SCT/HO/12W/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.8(h) 7.8(w) 4.1(d)
88683-SU	LFX/WS/SCT/RT/12W/SG/BK/PC	12	800	120	30K/40K/50K	50000	WL	9.5(h) 8.0(w) 4.5(d)
88687-SU	LFX/WS/SCT/LN/9W/BK/PC	9	600	120	30K/40K/50K	50000	WL	11.8(h) 6.1(w) 8.1(d)

Outdoor Wall Mount Sconce Vintage Style

sunlite

88684-SU



- 12 Watts
- 800 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI
- 120V



88688-SU



- 9 Watts
- 600 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI
- 120V



81300-SU



- 9 Watts
- 900 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- Glass Clear Lens
- Black Finish
- 80 CRI
- 120V



81038-SU



- 10 Watts
- 800 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Crystal Glass Lens
- Black Finish
- 80 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88684-SU	LFX/WS/SCT/LN/12W/BK	12	800	30K/40K/50K	50000	WL	8.7(h) 8.8(w) 10.3(d)
88688-SU	LFX/WS/SCT/HCL/9W/GL/BK	9	600	30K/40K/50K	50000	WL	9.8(h) 7.3(w) 3.7(d)
81300-SU	LFX/WS/CL/9W/MV/SCT/BK	9	900	30K/40K/50K	50000	WL	13.8(h) 7.3(w) 9.5(d)
81038-SU	LFX/WS/XTL/12"/10W/SCT/BK	10	800	30K/40K/50K	50000	DL,DIM	11.0(h) 5.5(w) 3.0(d)

Outdoor Wall Mount Sconce

Contemporary Style

8"

88673-SU

- 12 Watts
- 600 Lumens



8"

81480-SU

- 12 Watts
- 600 Lumens



14"

81481-SU

- 20 Watts
- 1100 Lumens



14"

81482-SU

- 20 Watts
- 1100 Lumens



SPECIFICATION

- 30K/40K/50K
- Metal Body
- White Lens
- 80 CRI
- 120-277V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88673-SU	LFX/CONT/WS/8"/12W/SCT/ORB/ACRY	12	600	30K/40K/50K	50000	WL	8.0(h) 6.0(w) 4.0(d)
81480-SU	LFX/CONT/WS/8"/12W/SCT/SL/ACRY	12	600	30K/40K/50K	50000	WL	8.0(h) 6.0(w) 4.0(d)
81481-SU	LFX/CONT/WS/14"/20W/SCT/ORB/ACRY	20	1100	30K/40K/50K	50000	WL	14.0(h) 5.9(w) 3.2(d)
81482-SU	LFX/CONT/WS/14"/20W/SCT/SL/ACRY	20	1100	30K/40K/50K	50000	WL	14.0(h) 5.9(w) 3.2(d)

46091-SU

- Brushed Nickel Finish



46092-SU

- Black Finish



**BULB
REQUIRED**

46094-SU

- Brushed Nickel Finish



46093-SU

- Black Finish



SPECIFICATION

- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Aluminum Body
- ETL-Wet Location

BULB SUGGESTION



Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
46091-SU	FIX/WS/E26/SS	Brushed Nickel	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
46092-SU	FIX/WS/E26/BLACK	Black Powder	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
46093-SU	FIX/WS/E26/BLACK	Black Powder	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)
46094-SU	FIX/WS/E26/SS	Brushed Nickel	Opal PC	1	60	4.1(h) 6.7(w) 11.8(d)

Outdoor Wall Mount Sconce Contemporary Style

sunlite®

85104-SU

MADE TO ORDER

LED
BUILT-IN

5
YEAR
WARRANTY

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Acrylic Lens
- Black Finish
- 90 CRI
- 120V



85105-SU

MADE TO ORDER

- White Finish



85106-SU

LED
BUILT-IN

5
YEAR
WARRANTY

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Acrylic Lens
- Black Finish
- 90 CRI
- 120V



85109-SU

- White Finish



85113-SU

LED
BUILT-IN

5
YEAR
WARRANTY

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Acrylic Lens
- Black Finish
- 90 CRI
- 120V



85114-SU

- White Finish



85110-SU

MADE TO ORDER

LED
BUILT-IN

5
YEAR
WARRANTY

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Acrylic Lens
- Black Finish
- 90 CRI
- 120V



85112-SU

MADE TO ORDER

- White Finish



****MTO** = Contact us about *made-to-order* items, inventory, and lead time.

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85104-SU**	LFX/WS/R/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
85105-SU**	LFX/WS/R/12W/SCT/WH	12	850	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
85106-SU	LFX/WS/RC/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
85109-SU	LFX/WS/RC/12W/SCT/WH	12	850	30K/40K/50K	50000	WL	6.7(h) 6.7(w) 4.0(d)
85113-SU	LFX/WS/SQC/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
85114-SU	LFX/WS/SQC/12W/SCT/WH	12	850	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
85110-SU**	LFX/WS/SQ/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)
85112-SU**	LFX/WS/SQ/12W/SCT/WH	12	850	30K/40K/50K	50000	WL	6.3(h) 6.3(w) 4.0(d)

Outdoor Wall Mount Sconce

4" Up & Down

81292-SU



- 18 Watts
- 1300 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- Glass Lens
- Black Finish
- 80 CRI
- 120V



4" Up / Down

81291-SU



- 9 Watts
- 650 Lumens
- 30K/40K/50K
- Aluminum & Steel Body
- Glass Lens
- Black Finish
- 80 CRI
- 120V



10" Up & Down

88143-SU



- 24 Watts
- 1700 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



8" Up / Down

88134-SU



- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81291-SU	LFX/CUBE/S/9W/SCT/BK	9	650	30/40K/50K	50000	WL	4.0(h) 3.75(w) 4.3(d)
81292-SU	LFX/CUBE/UD/18W/SCT/BK	18	1300	30/40K/50K	50000	WL	4.0(h) 3.75(w) 4.3(d)
88143-SU	LFX/UD/SQ/24W/SCT/MV/BK/10"	24	1700	30K/40K/50K	50000	WL	10.3(h) 3.5(w) 6.1(d)
88134-SU	LFX/D/SQ/8"/12W/SCT/BK	12	850	30K/40K/50K	50000	WL	8.1(h) 4.4(w) 6.1(d)

Outdoor Wall Mount Sconce

Cylinder Up & Down

sunlite

49204-SU

- 12 Watts
- 1000 Lumens
- 30K/40K/50K
- Dimmable
- Steel & Glass Body
- Clear Lens
- Brushed Nickel Finish
- 80 CRI
- 120V



81294-SU

- 12 Watts
- 1200 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



49205-SU

- 24 Watts
- 1800 Lumens
- 30K/40K/50K
- Dimmable
- Steel & Glass Body
- Clear Lens
- Brushed Nickel Finish
- 80 CRI
- 120



81295-SU

- 12 Watts
- 1200 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



88142-SU

- 24 Watts
- 1700 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277



90158-SU

- 120 volts
- Medium (E26) Base
- Metal Body
- Black Finish
- ETL Listed



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49204-SU	LFX/DOD/T/6/12W/3SCT/BN	12	1000	30K/40K/50K	50000	WL,DIM	6.0(h) 4.35(w) 4.3(d)
49205-SU	LFX/DOD/T/8/24W/3SCT/BN	24	1800	30K/40K/50K	50000	WL,DIM	8.1(h) 4.35(w) 4.3(d)
88142-SU	LFX/UD/R/12"/24W/BK/SCT	24	1700	30K/40K/50K	50000	WL	11.9(h) 4.3(w) 6.9(d)
81294-SU	LFX/UD/HC/12W/MV/SCT/BK	12	1200	30K/40K/50K	50000	WL,DIM	9.25(h) 4.5(w) 5.25(d)
81295-SU	LFX/UD/REC/12W/MV/SCT/BK	12	1200	30K/40K/50K	50000	WL,DIM	9.13(h) 4.5(w) 5.25(d)
90158-SU	FIX/CWS/E26/BK	-	-	-	-	WL	7.0(h) 4.4(w) 7.25(d)

Outdoor Wall Mount Sconce

Seedy Glass Design

12" Up & Down

81041-SU

- 10 Watts
- 600 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



12" Down

81330-SU

- 15 Watts
- 800 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



14" Down

81227-SU

- 12 Watts
- 500 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



7" Down

81046-SU

- 11 Watts
- 600 Lumens
- 3000K
- Dimmable
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
81041-SU	LFX/WS/SEEDY/CYL/12"/10W/SCT/BK	10	600	30K/40K/50K	50000	WL,DIM	12.0(h) 4.75(w) 4.0(d)
81330-SU	LFX/WS/CL/10W/CRI90/3SCT/BK	15	800	30K/40K/50K	50000	WL,DIM	12.0(h) 5.5(w) 4.0(d)
81227-SU	LFX/TERR/WS/4"/12W/3SCT/ORB/SEEDY	12	500	30K/40K/50K	50000	WL,DIM	14.0(h) 4.75(w) 4.25(d)
81046-SU	LFX/WS/SEEDY/UD/12"/11W/30K/BK	11	600	3000K	50000	WL,DIM	7.0(h) 5.0(w) 1.5(d)

Outdoor Wall Mount Sconce

Seedy Glass Design

sunlite

5" Down

81047-SU

- 12 Watts
- 600 Lumens
- 30K/40K/50K
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V

LED
BUILT-IN

5
YEAR
WARRANTY



81222-SU

- 9 Watts
- 450 Lumens
- 5000K
- 100-277V

6.5" Down

81051-SU

- 12 Watts
- 600 Lumens
- 30K/40K/50K
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V

LED
BUILT-IN

5
YEAR
WARRANTY



81170-SU

- 3000K
- 100-277V

81223-SU

- 5000K
- 100-277V

5.5" Up & Down

81040-SU

- 22 Watts
- 300 Lumens
- 3000K
- Dimmable
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V

LED
BUILT-IN

5
YEAR
WARRANTY



5.5" Up & Down

81205-SU

- 22 Watts
- 300 Lumens
- 3000K
- Dimmable
- Glass Body
- Clear Seedy Lens
- Black Finish
- 80 CRI
- 120V

LED
BUILT-IN

5
YEAR
WARRANTY



Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
81047-SU	LFX/INN/WS/5"/12W/SCT/BK/SEEDY	12	600	120	30K/40K/50K	50000	WL	13.8(h) 4.8(w) 2.5(d)
81222-SU	LFX/INN/WS/5"/9W/50K/BK/SEEDY	9	450	100-277	5000K	50000	WL	13.8(h) 4.8(w) 2.5(d)
81051-SU	LFX/INN/WS/6.5"/12W/SCT/BK/SEEDY	12	600	120	30K/40K/50K	50000	WL	13.8(h) 6.5(w) 2.5(d)
81170-SU	LFX/INN/WS/6.5"/12W/30K/BK/SEEDY	12	600	100-277	3000K	50000	WL	13.8(h) 6.5(w) 2.5(d)
81223-SU	LFX/INN/WS/6.5"/12W/50K/BK/SEEDY	12	600	100-277	5000K	50000	WL	13.8(h) 6.5(w) 2.5(d)
81040-SU	LFX/WS/SEEDY/UD/B/12"/22W/30K/BK	22	300	120	3000K	50000	WL,DIM	12.0(h) 5.5(w) 2.5(d)
81205-SU	LFX/WS/SEEDY/UD/12"/22W/30K/BK	22	300	120	3000K	50000	WL,DIM	12.0(h) 5.5(w) 2.5(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Outdoor Security Flood Light

Motion Sensor

Round Black Finish

88907-SU

- 5000K



88906-SU

- 3000K

White Finish

88909-SU

- 5000K



Built-in

SPECIFICATION

- 20 Watts
- 1800 Lumens
- Plastic Body
- Clear Lens
- Built-in Photocell & Motion Sensor
- 80 CRI

Square Black Finish

88911-SU

- 3000K



Built-in

SPECIFICATION

- 24 Watts
- 2400 Lumens
- Plastic Body
- Clear Lens
- Black Finish
- Built-in Photocell & Motion Sensor
- 80 CRI

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88906-SU	LFX/OSF/R/MS/20W/30K/BK	20	1800	120	3000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
88907-SU	LFX/OSF/R/MS/20W/50K/BK	20	1800	120	5000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
88909-SU	LFX/OSF/R/MS/20W/50K/WH	20	1800	120	5000K	35000	WL	9.3(h) 6.3(w) 7.6(d)
88911-SU	LFX/OSF/S/MS/24W/30K/BK	24	2400	120	3000K	35000	WL	11.9(h) 6.1(w) 5.9(d)

Flood Light

04918-SU

- 120 volts
- Medium (E26) Base
- Uses PAR38 Bulb(s)
- UL Listed



BULB SUGGESTION



PAR38
Med E26



A19
Med E26

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
04918-SU	PL2H/WH	White	-	2	60	4.3(h) 4.3(w) 8.5(d)

Outdoor Wall Mount Series

Wall Packs

sunlite

Adjustable Bracket Down Wall Pack

49169-SU

- 21/28/35 Watts
- 2730/3640/4550 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- 70 CRI
- 120-347V



LED
BUILT-IN

5
YEAR
WARRANTY

OPTIONAL ADDONS



Photo Sensor
97091-SU

Low Output

08562-SU

- 20/40/60/80 Watts
- 2780/5550/8330/11100 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- 80 CRI
- 120-347V



High Output

08563-SU

- 60/90/100/120 Watts
- 9000/13500/15000/18000 Lumens

LED
BUILT-IN

5
YEAR
WARRANTY

Rotatable Wall Pack

97094-SU

- 60 Watts
- 7800 Lumens



Rotate 270 Degrees to allow you
to customize your range of light

97095-SU

- 80 Watts
- 10000 Lumens



LED
BUILT-IN

5
YEAR
WARRANTY

SPECIFICATION

- 30K/40K/50K
- Dimmable
- Die-Cast Aluminum Body
- Polycarbonate Clear Lens
- Black Finish
- 70 CRI
- 100-277V

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49169-SU	LFX/SWP/MW/SCT/BRZ	21/28/35	2730/3640/4550	30K/40K/50K	50000	WL,DLC	8.0(h) 6.0(w) 4.0(d)
08562-SU	LFX/SWP/HMW/3SCT/BRZ/G3	20/40/60/80	2780/5550/8330/11100	30K/40K/50K	50000	WL,DLC	9.26(h) 8.5(w) 6.06(d)
08563-SU	LFX/WP/SCT/HMW/MV/G3	60/90/100/120	9000/13500/15000/18000	30K/40K/50K	50000	WL,DLC	9.26(h) 8.5(w) 6.06(d)
97094-SU	LFX/RWP/60W/3SCT	60	7800	30K/40K/50K	50000	WL,DIM,DLC	9.4(h) 5.9(w) 10.0(d)
97095-SU	LFX/RWP/80W/3SCT	80	10000	30K/40K/50K	50000	WL,DIM,DLC	8.0(h) 11.62(w) 12.0(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Outdoor Wall Mount Series

Wall Pack

87753-SU

- 25/40/60/80 Watts
- 3250/5200/7800/10400 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Clear Lens
- Bronze Finish
- 80 CRI
- 120-277V



OPTIONAL ADDONS



Photo Sensor
97091-SU



Emergency Battery
90712-SU

Cut Off Wall Pack

97064-SU

- 25/40/60/80 Watts
- 3000/10800 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- 70 CRI
- 120-277V

97069-SU

- 80 Watts
- 10640 Lumens
- 5000K



OPTIONAL ADDONS



Emergency Battery
90710-SU

Mini Wall Pack

88119-SU

- 12 Watts
- 850 Lumens
- 30K/40K/50K
- Aluminum Body
- White Lens
- Black Finish
- Built-in Photocell
- 80 CRI
- 120V



Mini Wall Pack

08564-SU

- 12/20/30 Watts
- 30K/40K/50K
- 1950/2600/3900 Lumens
- Aluminum Body
- White Lens
- Bronze Finish
- Built-in Photocell
- 80 CRI
- 120-277V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87753-SU	LFX/WP/SCT/MW/MV	25/40/60/80	3250/5200/7800/10400	30K/40K/50K	50000	WL,DIM,DLC	9.2(h) 14.3(w) 7.5(d)
97064-SU	LFX/WP/MW/3SCT	25/40/60/80	3000/10800	30K/40K/50K	50000	WL,DLC	8.3(h) 14.4(w) 9.2(d)
97069-SU	LFX/WP/80W/MV/50K	80	10640	5000K	50000	WL,DLC	8.3(h) 14.4(w) 9.2(d)
88119-SU	LFX/TP/12W/SCT/PC	12	850	30K/40K/50K	50000	WL	8.6(h) 5.3(w) 2.1(d)
08564-SU	LFX/MWP/MW/SCT/ORB/PC/G3	15/20/30	1950/2600/3900	30K/40K/50K	50000	WL	9.1(h) 5.9(w) 2.9(d)

Outdoor Wall Mount Series

Wall Packs & Flood Lights

sunlite

Mini Wall Pack

87820-SU

- Black Finish



Built-in leveler makes installation easy.



87821-SU

- White Finish



SPECIFICATION

- 15 Watts
- 1650 Lumens
- 27K/30K/35K/40K/50K
- Aluminum Body
- Polycarbonate Clear Lens
- Black Finish
- Built-in Photocell
- 80 CRI
- 120V

Low Wattage Outdoor Flood Light

85547-SU

- 45/60/80 Watts
- 6300/8400/11200 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- 80 CRI
- 120-277V



OPTIONAL ADDONS



Slip Fitter Mount
85585-SU



Trunion Mount
85584-SU



Slip Fitter Mount
85583-SU

High Wattage Outdoor Flood Light

85548-SU

- 100/125/150 Watts
- 14000/16800/21000 Lumens
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Bronze Finish
- 80 CRI
- 120-277V



OPTIONAL ADDONS



Slip Fitter Mount
85587-SU



Trunion Mount
85588-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
87820-SU	SF/WP/MN/9/15/85S/120/BK/PC	15	1650	27K/30K/35K/40K/50K	50000	WL	9.2(h)5.4(w)2.4(d)
87821-SU	SF/WP/MN/9/15/85S/120/WH/PC	15	1650	27K/30K/35K/40K/50K	50000	WL	9.2(h)5.4(w)2.4(d)
85547-SU	LFX/FL/MMW/SCT/PC	45/60/80	6300/8400/11200	30K/40K/50K	50000	WL	7.1(h) 9.6(w) 3.1(d)
85548-SU	LFX/FL/HMW/SCT/PC	100/125/150	14000/16800/21000	30K/40K/50K	50000	WL	8.6(h)11.6(w)3.9(d)

Outdoor Area Fixtures

Roadway Dusk To Dawn

49148-SU

- 36/48/60 Watts
- 4500/6000/7500 Lumens
- 30K/40K/50K
- Dimmable
- Die-Cast Aluminum Body
- Polycarbonate Clear Lens
- Dark Bronze Finish
- Built-in Photocell
- 80 CRI
- 120-227V



49149-SU

- 36/48/60 Watts
- 4500/6000/7500 Lumens
- 30K/40K/50K
- Dimmable
- Die-Cast Aluminum Body
- Polycarbonate Clear Lens
- Dark Bronze Finish
- Built-in Photocell
- 80 CRI
- 120-227V



49211-SU

- 60/80/100 Watts
- 12000 Lumens
- 35K/40K/50K
- Die-Cast Aluminum Body
- Polycarbonate Clear Lens
- 70 CRI
- 120-227V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49148-SU	LFX/RL/MW/SCT/PC	36/48/60	4500/6000/7500	30K/40K/50K	50000	WL,DIM,DLC	4.2(h) 7.0(w) 10.4(d)
49149-SU	LFX/RL/HMW/SCT/PC	72/96/120	9000/12000/15000	30K/40K/50K	50000	WL,DIM,DLC	5.1(h) 9.5(w) 13.5(d)
49211-SU	LFX/RL/HMW/SCT/G2/PC	60/80/100	12000	35K/40K/50K	50000	WL	3.49(h) 11.75" (d)

Outdoor Area Fixtures

Garage & Canopy Lights

sunlite

Square

85676-SU

- 40/60/80 Watts
- 5040/7560/10080 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum & Polycarbonate I
- Clear Lens
- Bronze Finish
- IP65
- 80 CRI
- 120-277V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85676-SU	SF/GC/SQ/MW/83S/MV/BZ	40/60/80	5040/7560/10080	30K/40K/50K	50000	DIM,WL,DLC	10.2(h) 10.2(w)3.4(d)
85670-SU	SF/GC/SQ/MW/83S/MV/BZ/MS	40/60/80	5227/7840/10453	30K/40K/50K	50000	DIM,WL,DLC	10.9(h) 10.9(w)6.14(d)

LED Commercial UFO High Bay

89791-SU

- 100/150/200 Watts
- 15300/22950/30600 Lumens
- 30K/40K/50K
- Dimmable
- Die-Cast Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



89782-SU

- 200 Watts
- 28000 Lumens
- 5000K
- Dimmable
- Die-Cast Aluminum Body
- Clear Lens
- Black Finish
- 80 CRI
- 120-277V



OPTIONAL ADDONS



Safety Cable
89790-SU



Polycarbonate Lens
89789-SU



Polycarbonate
Reflector
89787-SU



Microwave Motion
& Daylight Sensor
89699-SU



Remote Controller
89787-SU

Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
89791-SU	SF/HB/U/MW/83S/MV/BK	100/150/200	15300/22950/30600	30K/40K/50K	50000	WL,DIM,DLC	7.4(h)13.8(w)13.8(d)
89782-SU	LFX/HB/200W/50K/V2	200	28000	5000K	50000	WL,DIM,DLC	5.0(h)12.6(w)12.6(d)

Specifications may change without notice. We are not responsible for any typographical errors

SUNLITE.COM CALL 718.768.7000 TOLL-FREE 800.605.BULB

Outdoor Post Mounted Fixture

Pathway Lights

10"

MADE TO ORDER

47244-SU

- Pole Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb
- Polycarbonate Body
- White Acrylic Lens
- UL Listed—Wet Location
- Fit Most 3" Diameter Posts (Not Included)



12"

41320-SU



**BULB
REQUIRED**

BULB SUGGESTION



A19
Med E26

10"

47242-SU

- White Acrylic Lens



10"

47246-SU

- Clear Acrylic Lens



12"

41321-SU

- Clear Acrylic Lens



Carriage & Coach Style Collection

41322-SU

- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Metal & Glass Body
- UL Listed
- Fit Most 3" Diameter Posts (Not Included)



**BULB
REQUIRED**

BULB SUGGESTION



A19
Med E26

**MTO = Contact us about made-to-order items, inventory, and lead time.

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
47242-SU	DOD/10GL/BK/WH/MED	Black	White Acrylic	1	100	12.8(w) 10.0(d)
47246-SU	DOD/10GL/BK/CL/MED	Black	Clear Acrylic	1	100	12.8(w) 10.0(d)
47244-SU**	DOD/10GL/WH/WH/MED	White	White Acrylic	1	100	12.8(w) 10.0(d)
41320-SU	DOD/12GL/WH/WH/MED	White	White Acrylic	1	100	12.8(w) 12.0(d)
41321-SU	DOD/12GL/BK/CL/MED	Black	Clear Acrylic	1	100	12.8(w) 12.0(d)
41322-SU	ODI1150/BK	Black	Clear Glass	1	60	12.4(h) 5.9(w) 5.9(d)

Outdoor Post Mounted Fixture Pathway Lights

sunlite

49187-SU

- 25/40/60/80 Watts
- 3250/5200/7800/10400 Lumens
- 30K/40K/50K
- Aluminum Body
- Frosted Lens
- Black Finish
- 70 CRI
- 120-277V



85618-SU

- 70/100/150 Watts
- 30K/40K/50K
- Aluminum Body
- Clear Lens
- Black Finish
- 70 CRI
- 120-277V



Round Bollard

87995-SU

- 12/16/22 Watts
- 1620/2160/2970 Lumens
- 30K/40K/50K
- Aluminum & Polycarbonate Body
- Clear Lens
- Bronze Oxidation Treatment Finish
- 80 CRI
- IP65 Rated Weather Proof
- 120-277V



Mounting Hardware Included

Square Bollard

87996-SU

- 12/16/22 Watts
- 1560/2080/2860 Lumens
- 30K/40K/50K
- Aluminum & Polycarbonate Body
- Clear Lens
- Bronze Oxidation Treatment Finish
- 80 CRI
- IP65 Rated Weather Proof
- 120-277V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
49187-SU	LFX/PTL/MW/SCT	25/40/60/80	3250/5200/7800/10400	30K/40K/50K	50000	WL,DIM,DLC	40.0(h) 18.0(d)
85618-SU	LFX/PTL/SCT/55W	70/100/150		30K/40K/50K	50000	WL,DIM	19.2(h) 14.2(d)
87995-SU	LFX/LBF/R/14W/19W/24W/SCT	14/19/24	1620/2160/2970	30K/40K/50K	50000	WL,DIM	42.1(h) 6.3(d)
87996-SU	LFX/LBF/S/14W/19W/24W/SCT	14/19/24	1560/2080/2860	30K/40K/50K	50000	WL,DIM	42.1(h) 6.3(w)

Vaporproof

Wall Mount & Surface Mount

LED Wall Mount / Surface Mount

88144-SU

- 21 Watts
- 2560 Lumens
- 30K/40K/50K
- Dimmable
- Aluminum Body
- Frosted Glass Lens
- Gray Finish
- 80 CRI
- 120-277V



Two Way Mounting



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
88144-SU	LFX/VT/VTA/21W/3SCT	21	2560	30K/40K/50K	50000	WL,DIM,DLC	12.6(h) 4.96(w) 4.96(d)

Surface Mount

41329-SU

- Surface Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb
- Aluminium Body
- UL Listed-Wet Location
- Bulb Not Included



BULB
REQUIRED

BULB SUGGESTION



A19
Med E26

Wall Mount

41368-SU

- Wall Mount
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb
- Aluminium Body
- UL Listed-Wet Location



OPTIONAL ADDONS



Blue
88150-SU



Green
88151-SU



Red
88152-SU



Yellow
88153-SU

Item#	Description	Finish	Lens	Lights	Max Watts	Dimension(in)
41329-SU	VT100 1/2" Pipe	Metallic	Clear Glass	1	100	9.0(w) 4.3(d)
41368-SU	VTA100	Metallic	Clear Glass	1	150	7.2(w) 9.5(h) 4.2(d)

1 Light Tripod Stand

88176-SU

- 72 Watts
- 7000 Lumens
- 4000K



2 Light Tripod Stand

88178-SU

- 144 Watts
- 7000 Lumens
- 4000K



SPECIFICATION

- Aluminum Body
- Clear Glass Lens
- Yellow Finish
- 80 CRI
- 120V

Item#	Description	Watt	Lumen	Volt	Color Temp	Hours	Features	Dimension(in)
88176-SU	LFX/WL/1H/72W/40K	72	7000	120	4000K	50000	WL	25.4(h) 11.8(w) 5.1(d)
88178-SU	LFX/WL/2H/144W/40K	144	14000	120	4000K	50000	WL	25.4(h) 11.8(w) 5.1(d)

15 FT LED Portable Work Light

88179-SU

25 FT

88180-SU



Grounded Outlet



SPECIFICATION

- 12 Watts
- 1200 Lumens
- Plastic Body
- COB LED
- Built-in Grounded Outlet

Item#	Description	Watt	Lumen	Color Temp	Hours	Cord	Dimension(in)
88179-SU	LFX/PWL/12W/15FT	12	1200	6200K	50000	15 FT	17.3(h) 4.7(w) 3.9 (d)
88180-SU	LFX/PWL/12W/25FT	12	1200	6200K	50000	25 FT	17.3(h) 4.7(w) 3.9 (d)

LED Construction Work Light

Hanging Mount

85262-SU

- 60 Watts
- 7500 Lumens
- 5000K
- Aluminum & Plastic Body
- Cage Polycarbonate Lens
- Orange Finish
- Linkable
- 80 CRI
- 120V



Item#	Description	Watt	Lumen	Color Temp	Hours	Features	Dimension(in)
85262-SU	LFX/LED/CC/60W/50K/V2	60	7500	5000K	50000	DL	12.1(w) 6.9(d)

String Lights with S14 LED Bulbs

Outdoor / Indoor

24 FT 7 Light

80571-SU

- Plastic Body
- Clear Bulbs
- Connect-able Strands
- UL Listed
- S14 LED Bulbs Included



48 FT 15 Light

80572-SU



Item#	Description	Finish	Color Temp	Lights	Hours	Dimension(in)
80571-SU	EXT/LED/SL/24'/7S	Black	2700K	7 x (1.5W)	25000	24 FT
80572-SU	EXT/LED/SL/48'/15S	Black	2700K	15 x (1.5W)	25000	48 FT

50 FT 5 Light

04223-SU

- 14 Gauge Wire
- 120 volts
- Medium (E26) Base
- Uses A19 Bulb(s)
- Plastic Body
- ETL Listed
- Bulb Not Included



50 FT 5 Light

04224-SU

- 16 Gauge Wire

100 FT 10 Light

04227-SU

- 16 Gauge Wire



BULB SUGGESTION



Item#	Description	Finish	Gauge	Lights	Max Watts	Dimension
04223-SU	EX50-14/2/SL	Yellow	14	5	75	50 FT
04224-SU	EX50-16/2/SL	Yellow	16	5	150	50 FT
04227-SU	EX100-16/2/SL	Yellow	16	10	150	100 FT



Exit Sign
Light Fixtures

LED Exit Sign & Emergency Lights Combo

2-in-1 Combo

Metal Exit Sign Combo

05275-SU



- Back Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Metal Housing
- UL Listed



New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.



Optional Third Head Included




LED
BUILT-IN

Thermoplastic Exit Sign Combo

05279-SU


- Back & Top Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Thermoplastic Housing
- UL Listed

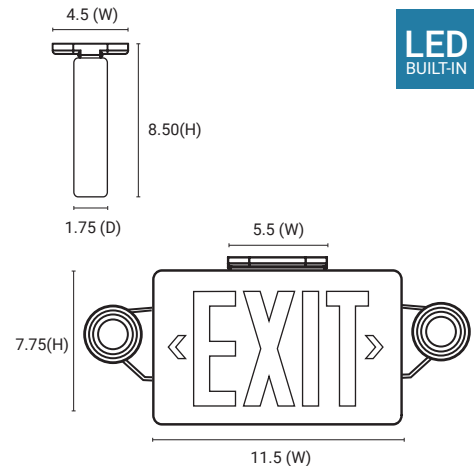

LED
BUILT-IN

04342-SU

- Back, Top & Side Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Thermoplastic Housing
- UL Listed

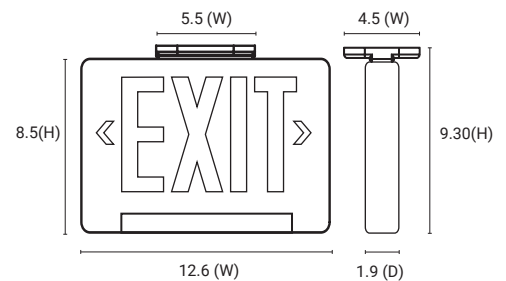

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
05275-SU	EXIT/LED/COMBO/1F/2-3H/EM/NYC	White Single Face	Metal	2 or 3	Back	10.4(h) 14.5(w) 2.2(d)
05279-SU	EXIT/LED/R/2H/1-2F/COMBO	White One or Two Face	Thermoplastic	2	Back Top	8.5(h) 11.5(w) 1.75(d)
04342-SU	EXIT/1/R/W/RC	White One or Two Face	Thermoplastic	1	Back, Top, Side	9.3(h) 12.6(w) 1.9(d)


Metal Exit Sign

05276-SU

- Back, Top & Side Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Metal / Thermoplastic Housing
- UL Listed




New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

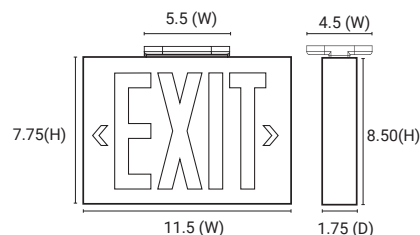LED
BUILT-IN

Thermoplastic Exit Sign

05271-SU


- Back, Top & Side Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Metal / Thermoplastic Housing
- UL Listed

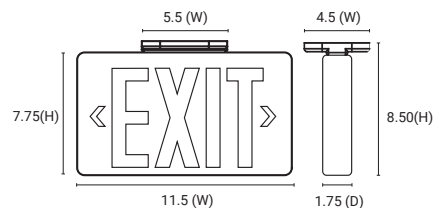LED
BUILT-IN

Metal Exit Sign

04344-SU

- Back & Top Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- UL Listed (Rated Wet Location)

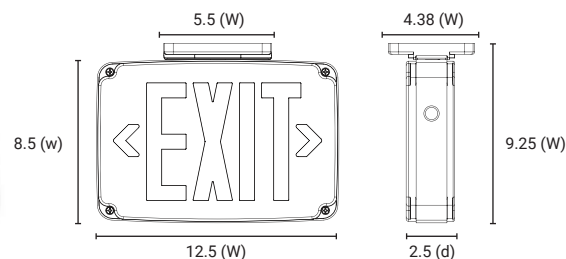LED
BUILT-IN

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
05276-SU	EXIT/LED/1-2F/EM/NYC	One or Two Face	Metal	1	Back, Top, Side	8.5(h) 11.5(w) 1.75(d)
05271-SU	EXIT/LED/R/EM/1-2F	One or Two Face	Thermoplastic	1	Back, Top, Side	8.5(h) 11.5(w) 1.75(d)
04344-SU	EXIT/SU/2F/R/WH/WL/EM	Two Face	Metal	1	Back, Top	8.5(h) 12.5(w) 2.5(d)

LED Exit Sign

Edge Lit & Recessed Mount


Metal Recessed Mount Exit Sign

04326-SU

- Recessed Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- UL Listed



New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

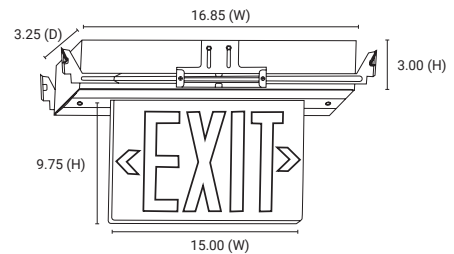

LED
BUILT-IN


Metal Clear One Face

05277-SU

- Top & Side Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- UL Listed



New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

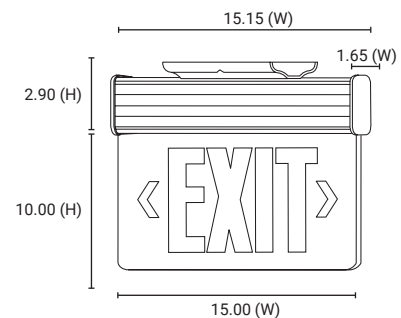

LED
BUILT-IN


Metal Mirror Aluminum Two Face

05278-SU

- Top & Side Mount
- 120 /277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- UL Listed



New York City Exit signs require red lettering with a height of 8 inches, and the unit must be made of metal or other durable materials.

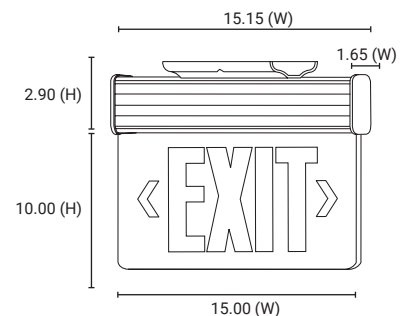

LED
BUILT-IN

Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
04326-SU	EXIT/EDGE/RC/2RF/MI/AL/EM/NYC	Mirror Two Face	Acrylic & Metal	1	Recessed	12.75(h) 16.85(w) 3.25(d)
05277-SU	EXIT/LED/EDGE/SU/1F/WH/CL/EM/NYC	Clear One Face	Acrylic & Metal	1	Top, Side	12.9(h) 15.15(w) 1.65(d)
05278-SU	EXIT/LED/EDGE/SU/2F/WH/MI/EM/NYC	Mirror Aluminum Two Face	Acrylic & Metal	1	Top, Side	12.9(h) 15.15(w) 1.65(d)

Metal Emergency Lights

05274-SU

- Wall Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Metal Body
- UL Listed



Thermoplastic Emergency Lights

05268-SU

- Wall Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Plastic Body
- UL Listed



Thermoplastic Emergency Lights

05269-SU

- Wall Mount
- 120/277 volts
- Rechargeable NiCd Battery
- 90 Minutes Illumination
- Plastic Body
- UL Listed



Item#	Description	Lens	Finish	Lights	Mounting	Dimension(in)
05274-SU	EMER/LED/2H/EM/NYC	White Two Head	Metal	2	Back	10.4(h) 14.5(w) 2.2(d)
05268-SU	EMER/LED/2H	White Two Head	Plastic	2	Back	4.3(h) 10.1(w) 3.5(d)
05269-SU	EMER/LED/2H/COM	White Two Head	Plastic	2	Back	3.9(h) 6.3(w) 1.8(d)

Note

[illegible]

Sunshine Lighting
744 Clinton Street
Brooklyn, NY 11231

